


**SB-POOL**

Your pool, easier

## BONDS | REPAIR | SEAL

UNDERWATER REPAIR | FLEXIBLE | CHEMICAL RESISTANCE

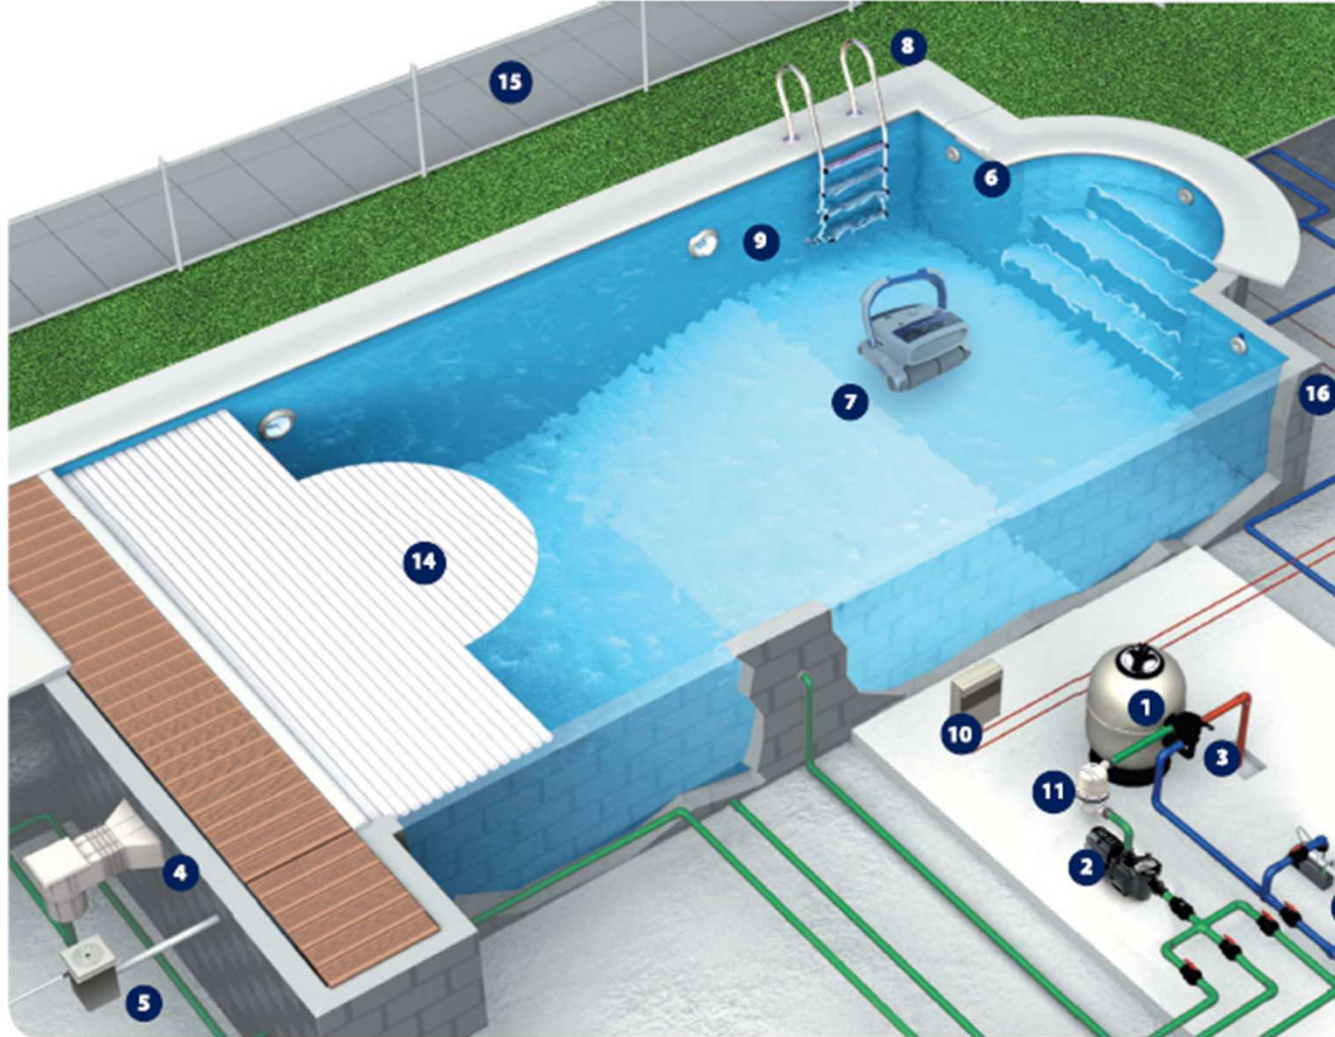

underwater



clean



elastic



easy to use



fast  
ready in 10'

### Tiles




### PVC



### Metal



### Wood



### Fiber glass



### Liner



resistant  
chemical  
products



resistant  
up to 2000kg



## SBPOOL SUPER40

TWO-COMPONENT SELF-APPLYING SYRINGE  
SKU: SP-S40-SF30

Two-component adhesive, structural, flexible and fast that bonds most materials. Bonds, repairs and seals under all conditions, even underwater. Really easy to use.



## SBPOOL SUPERPLAST LIGHT

ADHESIVE PUTTY IN FLEXIBLE PACKAGING  
SKU: SP-SPAR5

Adhesive putty of high mechanical properties, filled inside of an innovative flexible mono-use packaging system for several components. Bonds, repairs and seals under all conditions, even underwater. Really easy to use.

# Super40

## TWO-COMPONENT SELF-APPLYING SYRINGE

Innovative self-applying and self-mixing system.

**Syringe packaging 2K:** Net volume 30 ml

**Mixing cannulas:** Double spindle y self-mixing

**Dimensions:** 22.5 x 12 x 4 cm

**Weight:** 55 g

**Performance:** 0,2 x 1 m

**SKU:** SP-S40-SF30



### WAY TO USE:

- Remove the safety cap, insert the mixing nozzle and press. NOTE: ensure the correct mixing of the components in the first applications.
- Working time: 3-5 minutes.
- Cure time: 10 minutes.
- After curing, it can be cut, drilled and painted.

### Mixing cannulas HELIX


Minimum size to guarantee a 100% homogeneous mixture without product losses



**Self-applying and self-mixing syringe SELFIX**  
No need for additional accessories to apply the product



**ONE-WAY cap**  
It has a single position to prevent contamination of the two components



# SuperPlast

## ADHESIVE PUTTY IN FLEXIBLE PACKAGING

Innovative flexible mono-use packaging system for several components.

Flexible package 4K: Net volume 5 ml

Accessories KIT: flexible polypropylene spatula, nitrile gloves and CLEANER

Dimensions: 10.5 x 8 x 3 cm

Weight: 35 g

Performance: 15 x 15 cm

SKU: SP-SPAR5 (thickener)



### WAY TO USE:

- Press the components to break the seal and mix.
- Working time: 4 minutes.
- Cure time: 22 minutes.
- After curing, it can be cut, drilled and painted.
- Specific products for: fiberglass and carbon fiber.

### EASY-OPEN

Easy-open system, without the need for tools or other accessories.



### FLEXPAK

Flexible container that allows its use for solids and viscous liquids, with different possibilities of seals.



### EASY-MIX

Ensures proper mixing by pressure sensitive sealing.

# MATERIALS

	FABRIC	WOOD	ABS	RUBBER	FOAM	PVC	METAL	CERAMIC	INNOX	IRON	FIBER GLASS	GLASS
IRON	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5
INNOX	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5
GLASS	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	
FIBER GLASS	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5		
CERAMIC	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5				
METAL	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5					
PVC	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5						
FOAM	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5							
RUBBER	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5								
ABS	SP40 SPAR5	SP40 SPAR5	SP40 SPAR5									
WOOD	SP40 SPAR5	SP40 SPAR5										
FABRIC	SP40 SPAR5											

■ Excellent  
■ Works

