




ChlorPlus 20

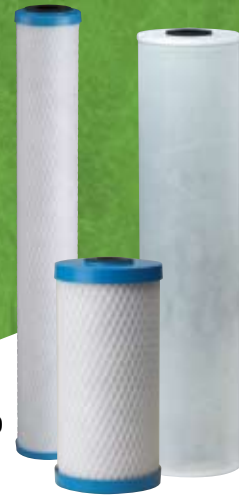

CRFC20-BB

ChlorPlus BB

CHLORAMINE REDUCTION CARBON CARTRIDGES

- Superior chloramine and chlorine reduction
- CRFC20-BB Radial Flow
- ChlorPlus® Series Carbon Briquette

PENTEK® offers multiple product solutions for chloramine reduction. Chloramine is increasingly becoming more common as an alternative to chlorine for water treatment.

The ChlorPlus® carbon block cartridges help reduce sediment while providing greater chloramine performance capacities than granular carbon. They also significantly reduce the carbon fines found in many granular canisters.

The CRFC20-BB heavy duty radial flow cartridge measures 4½ inches in diameter and 20 inches long, which is ideal for higher flow rate

and capacity applications. This cartridge incorporates a 70-micron porous polypropylene outer shell and a spun polypropylene-wrapped core. The bed of granular activated carbon (GAC) between the outer shell and core creates a unique radial flow design which effectively removes chloramine, has a low pressure drop, and helps to reduce fines commonly seen in GAC-style cartridges.

All of these cartridges utilize advanced activated carbon technology which allows superior chloramine and chlorine reduction.

The range of sizes and capacities offered by PENTEK chloramine reduction cartridges makes them ideal for both point-of-entry (POE) and point-of-use (POU) applications.

Contact us:

Chainaris Phuket Engineering Co., Ltd.

63/13 Moo.2, T.Vichit, A.Maung Phuket 83000



Tel: 076-513100-4 Fax: 076-513105

Line: @chainaris, @chainarissshop



PENTEK
Pentair Water

CHLORAMINE REDUCTION CARTRIDGES

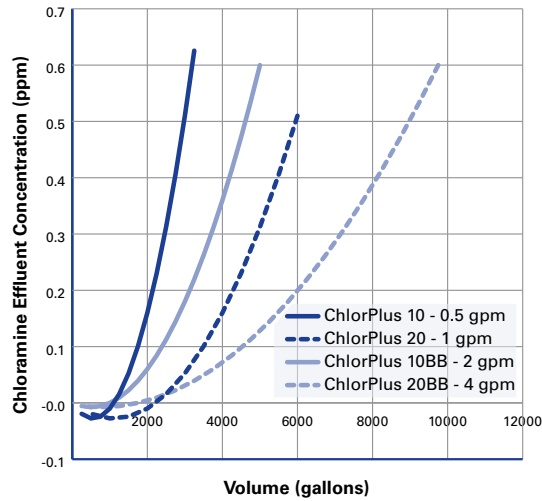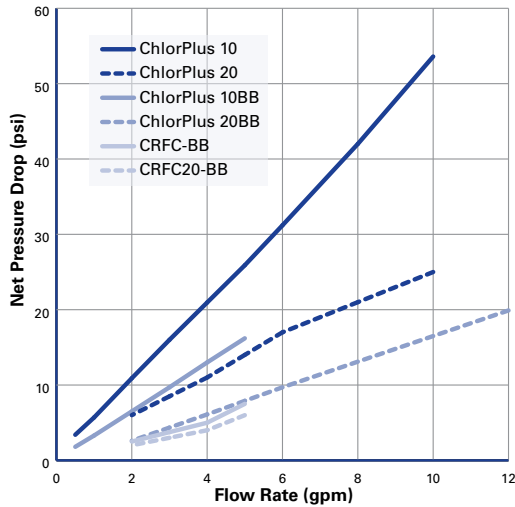

Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating* (nominal)	Initial ΔP (psi) @ Flow Rate (gpm)	Chlorine Taste & Odor**† Reduction @ Flow Rate	Chloramine Reduction**† @ Flow Rate (gpm)
ChlorPlus 10	2 7/8" x 9 3/4" (73 mm x 248 mm)	1	6 psi @ 1.0 gpm (0.41 bar @ 3.8 Lpm)	>50,000 gallons @ 1 gpm (>189,270L @ 3.8 Lpm)	2,500 gallons @ 0.5 gpm (9,463L @ 1.9 L/min) 1,000 gallons @ 1.0 gpm (3,785L @ 3.8 L/min)
ChlorPlus 20	2 7/8" x 20" (73 mm x 508 mm)	1	6 psi @ 2 gpm (0.41 bar @ 7.6 Lpm)	>100,000 gallons @ 2 gpm (>378,451L @ 7.6 Lpm)	5,000 gallons @ 1.0 gpm (18,927L @ 3.8 L/min) 2,000 gallons @ 2.0 gpm (7,570L @ 7.6 L/min)
ChlorPlus 10BB	4 1/2" x 9 3/4" (114.3 mm x 248 mm)	1	6 psi @ 2.0 gpm (0.41 bar @ 7.6 Lpm)	>250,000 gallons @ 2 gpm (>946,352L @ 7.6 Lpm)	3,500 gallons @ 2.0 gpm (13,249L @ 7.6 L/min)
ChlorPlus 20BB	4 1/2" x 20" (114.3 mm x 508 mm)	1	6 psi @ 4.0 gpm (0.41 bar @ 15.2 Lpm)	>500,000 gallons @ 4 gpm (>1,892,706L @ 15.2 Lpm)	7,000 gallons @ 4.0 gpm (26,498L @ 15.2 L/min)
CRFC-BB	4 1/2" x 9 3/4" (114 mm x 248 mm)	20	2.5 psi @ 2.5 gpm (0.17 bar @ 9.5 Lpm) <1 psi @ 1.5 gpm (<0.07 bar @ 5.7 Lpm)	>100,000 gallons @ 2 gpm (>378,451L @ 7.6 Lpm)	12,000 gallons @ 1.5 gpm (45,424L @ 5.7 L/min) 5,000 gallons @ 2.5 gpm (18,927L @ 9.5 L/min)
CRFC20-BB	4 1/2" x 20" (114 mm x 508 mm)	20	2.5 psi @ 5 gpm (.17 bar @ 18.9 Lpm) <1 psi @ 2.5 gpm (<.07 bar @ 9.5 Lpm)	>200,000 gallons @ 4 gpm (>757,082L @ 15.2 Lpm)	25,000 gallons @ 2.5 gpm (94,635L @ 9.5 L/min) 10,000 gallons @ 5.0 gpm (37,854L @ 18.9 L/min)

* Based on manufacturer's internal testing

Materials of Construction

Part	ChlorPlus®	CRFC-BB/CRFC20-BB
Filter Media	Advanced Bonded PAC	Advanced Granular Activated Carbon
Endcaps	Polypropylene	Polypropylene
Inner Wrap/Core	Polyolefin	Spun Polypropylene
Outer Wrap/Shell	Polyolefin	Polyethylene
Expansion Pad	N/A	N/A
Post Filter	N/A	Spun Polypropylene
Netting	Polyethylene	N/A
Gasket	Santoprene	Santoprene
Temperature Rating	40–125°F (4.4–51.7°C)	40–125°F (4.4–51.7°C)

WARNING: For drinking water applications, do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Some harmless bacteria will attack cellulose media cartridges. If your cartridge seems to disintegrate, or has a musty or moldy odor, switch to a synthetic media cartridge or consult the manufacturer.

†NOTE: Estimated capacity tested at given flow rate using 2 ppm free available chlorine to 0.5 ppm breakthrough and 3 ppm chloramine to 0.5 ppm breakthrough.

NOTE: Increased flow rates may result in less effective chlorine reduction.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047
 Customer Service: 800.645.0267 • Fax: 888.203.7361 • supportspecialist@pentekfiltration.com
 International: 920.457.9435 • Fax: 920.457.2417 • international@pentekfiltration.com
 www.pentekfiltration.com