

ShinMaywa

Applications of Pumps, Blowers, Aerators, and Related Equipment



For a better tomorrow. ShinMaywa makes the world more comfortable and convenient place.



We have a dream.
Striving to make society livelier, brighter and harmonious.

Aircraft Business



Training & supporting plane U-36A



US-1A search-and-rescue amphibian

- Aircraft production
- Aircraft upgrading and servicing
- Aircraft-related systems and equipment



US-2 search-and-rescue amphibian

Special Purpose Truck Business

- Construction vehicles
- Environment-related vehicles
- Material-handling vehicles



Detachable container system "ARMROLL"



Dump truck



Refuse compactor "G-PX"



Rotating-plate garbage truck "G-RX"



Tail gate lifter "UNDER VENCELLE GATE"



Tanker

Parking Systems Business

- Mechanical parking systems



Elevator-type car parking system "ELEPARK"



Box type circulating parking system "TRANSPARK"



Horizontal circulating parking system "CROSSPARK"

- Airport-related facilities



Aircraft passenger boarding bridge "PAXWAY"



History of ShinMaywa

SINCE 1920 Meeting human and society needs in the modern history of Japan

● Founding days

1920
Kawanishi Machinery Company was founded. Located in Kobe, its aircraft manufacturing division was set up, which became later Kawanishi Aircraft Company Limited.

1928
Kawanishi Aircraft Company Limited was established. Lots of top-rated planes, such as "Nishiki flying boat" and "Naval fighter plane Shidenkai", were fabricated there.

● Postwar recovery

1949
Shin Meiwa Industry Company Limited was established. While it was banned after the war to manufacture aircraft, the company made a clean restart with new business lines, based on the history of Kawanishi Aircraft Company Limited and backed by the accumulated know-how and experiences. Around then, the company came up with the first dump truck model.



Pioneer brand of motorbike "Pointer"

1949
•Motorbike "Pointer" launched.

Joining in civilian sector

1949
•First dump truck model completed.



1950
•Production of aircraft components started.

Focus on aircraft



1920
•Kawanishi Nigata plane (many persons mounted to demonstrate the plane's toughness)



1943
•Naval fighter plane Shidenkai



Supporting urban infrastructure development

1954
•First self-priming pump completed.



● Toward an affluent Japan, onto the global arena

1964
•Technical alliance with a Swedish partner for the manufacture of electric submersible pumps; Production started.
•1st Rotary & Vertical type Car Parking System developed.



1965
•Speed Pack (refuse collector) production started.

1966
•Defense Agency (now Ministry of Defense) placed an official order for the first PX-S flying boat prototype. The prototype made its first flight in the following year.

1968
•Technical alliance with an American partner for the manufacture of "Jetway" passenger boarding bridges.



1971
•Technical alliance with a French partner for the manufacture of dumping devices (Tentsuki Dump).

1973
•TOWN PACK (collector for large size refuse) developed.

1974
•First flight of the prototype of PS-1 Kai (renamed to US-1), the first Japanese amphibian, succeeded.



● Establishing the ShinMaywa brand



1992
•Production of B777 "Wing-to-Body Fairing" started.

1999
•Refuse Transfer Station Systems completed in Jakarta, Indonesia.

2003
•First flight of the prototype of US-1A Kai (renamed to US-2) succeeded.

2005
•First model of new Crushing and Compacting type Refuse Collectors, developed with Fuji Heavy Industries Ltd., "TOWN PACK" G-PX series launched.

2009
•The Submersible Pump "CNW Series" received the Japan Machinery Federation President's Award for its superior energy-saving performance.



•EV(Electric Vehicle) charging system for "Elepark" Elevator Car Parking System launched.

2012
•"CNX" series stationary submersible pumps (NonClog type) developed.
•"SD-N" diagonal-flow submersible pumps, with high-speed rotary impeller, developed.

2014
•Fluid equipment business on its 60th anniversary.

2020
•Celebrated the 100th anniversary of the founding of the business.

Industrial Systems Business

- Terminating machine
- DD motors
- Vacuum unit



Terminating machine "TR500"



Pneumatic spindle unit "SPM30C"



Ion plating unit "VCD1300AD"

- Thin film-Surface reforming business
- Environmental systems



DLC (Diamond-Like Carbon) coating unit



Recycling plaza (Koshigaya Recycling Center)

Plants



Ono Plant



Takarazuka Plant



Konan Plant



Sano Plant




Samukawa Plant



Hiroshima Plant

Flow Chart of Intermittent Aeration Treatment

With these ShinMaywa equipment, you can enjoy wastewater treatment process effectively. For example, this is one of popular wastewater treatment process.

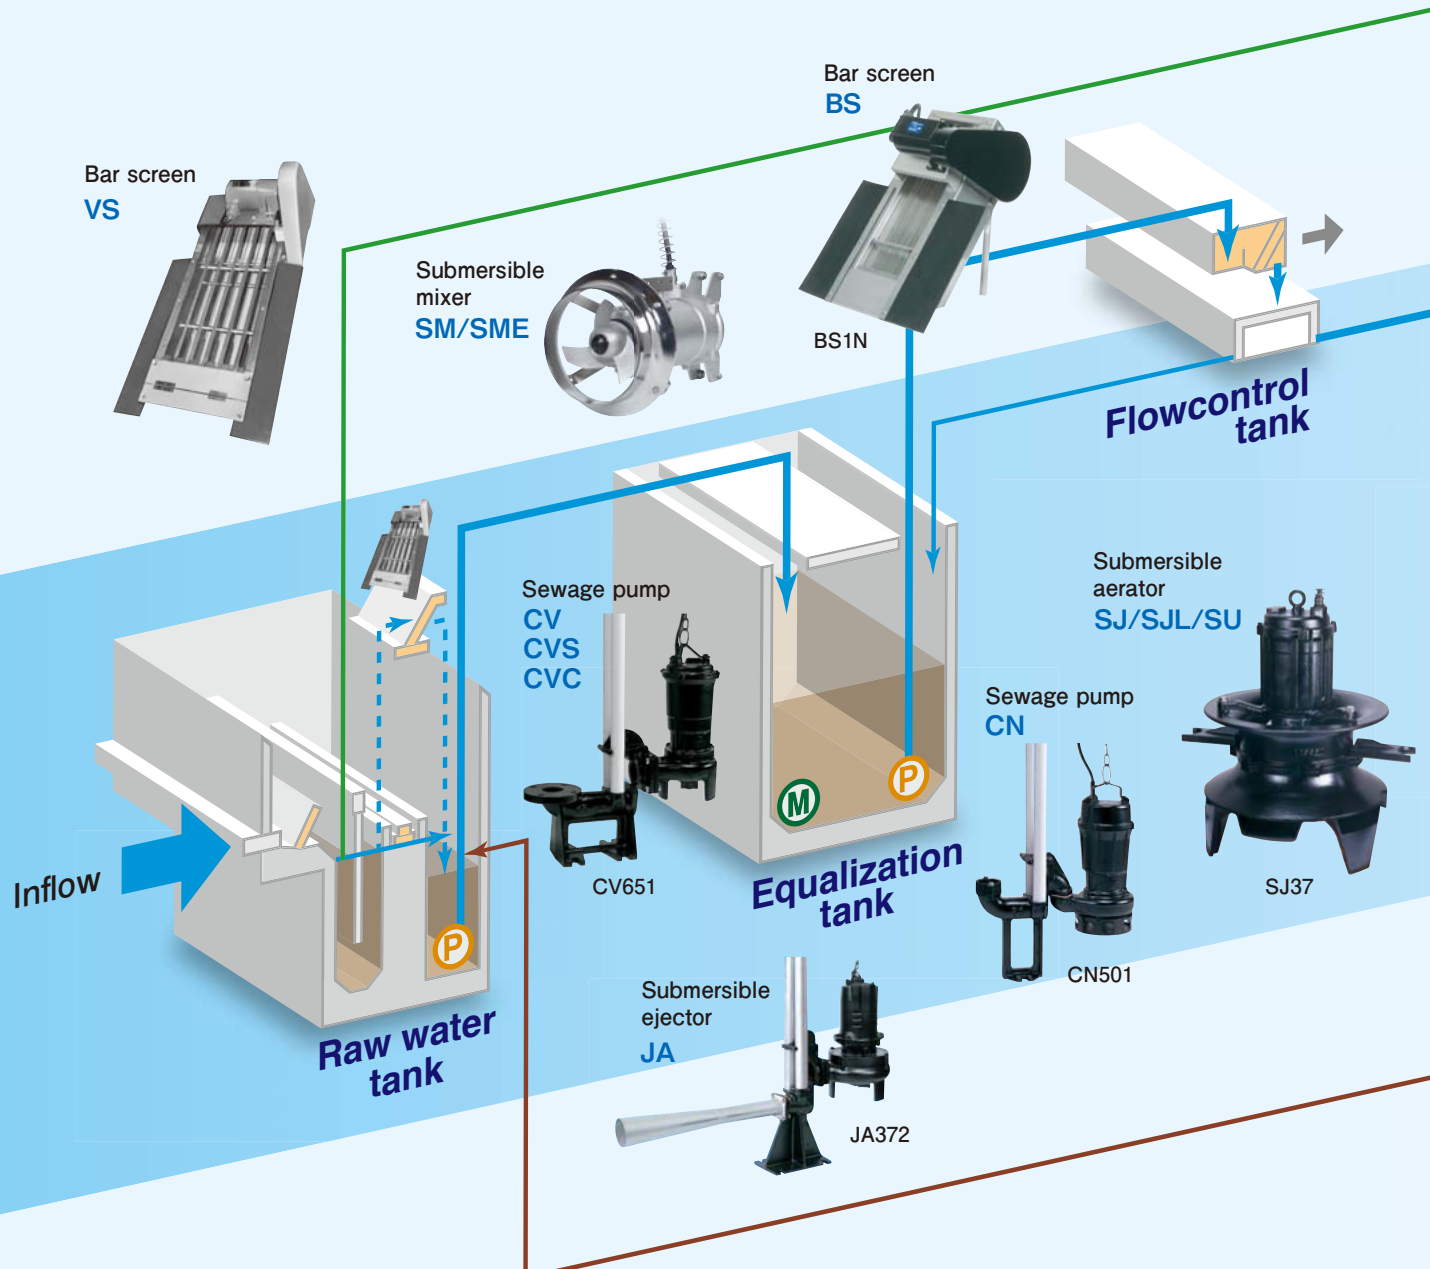

Supply Records




CNT (Dry Pit Pump)



ARS (Blower)



ARS (Blower)

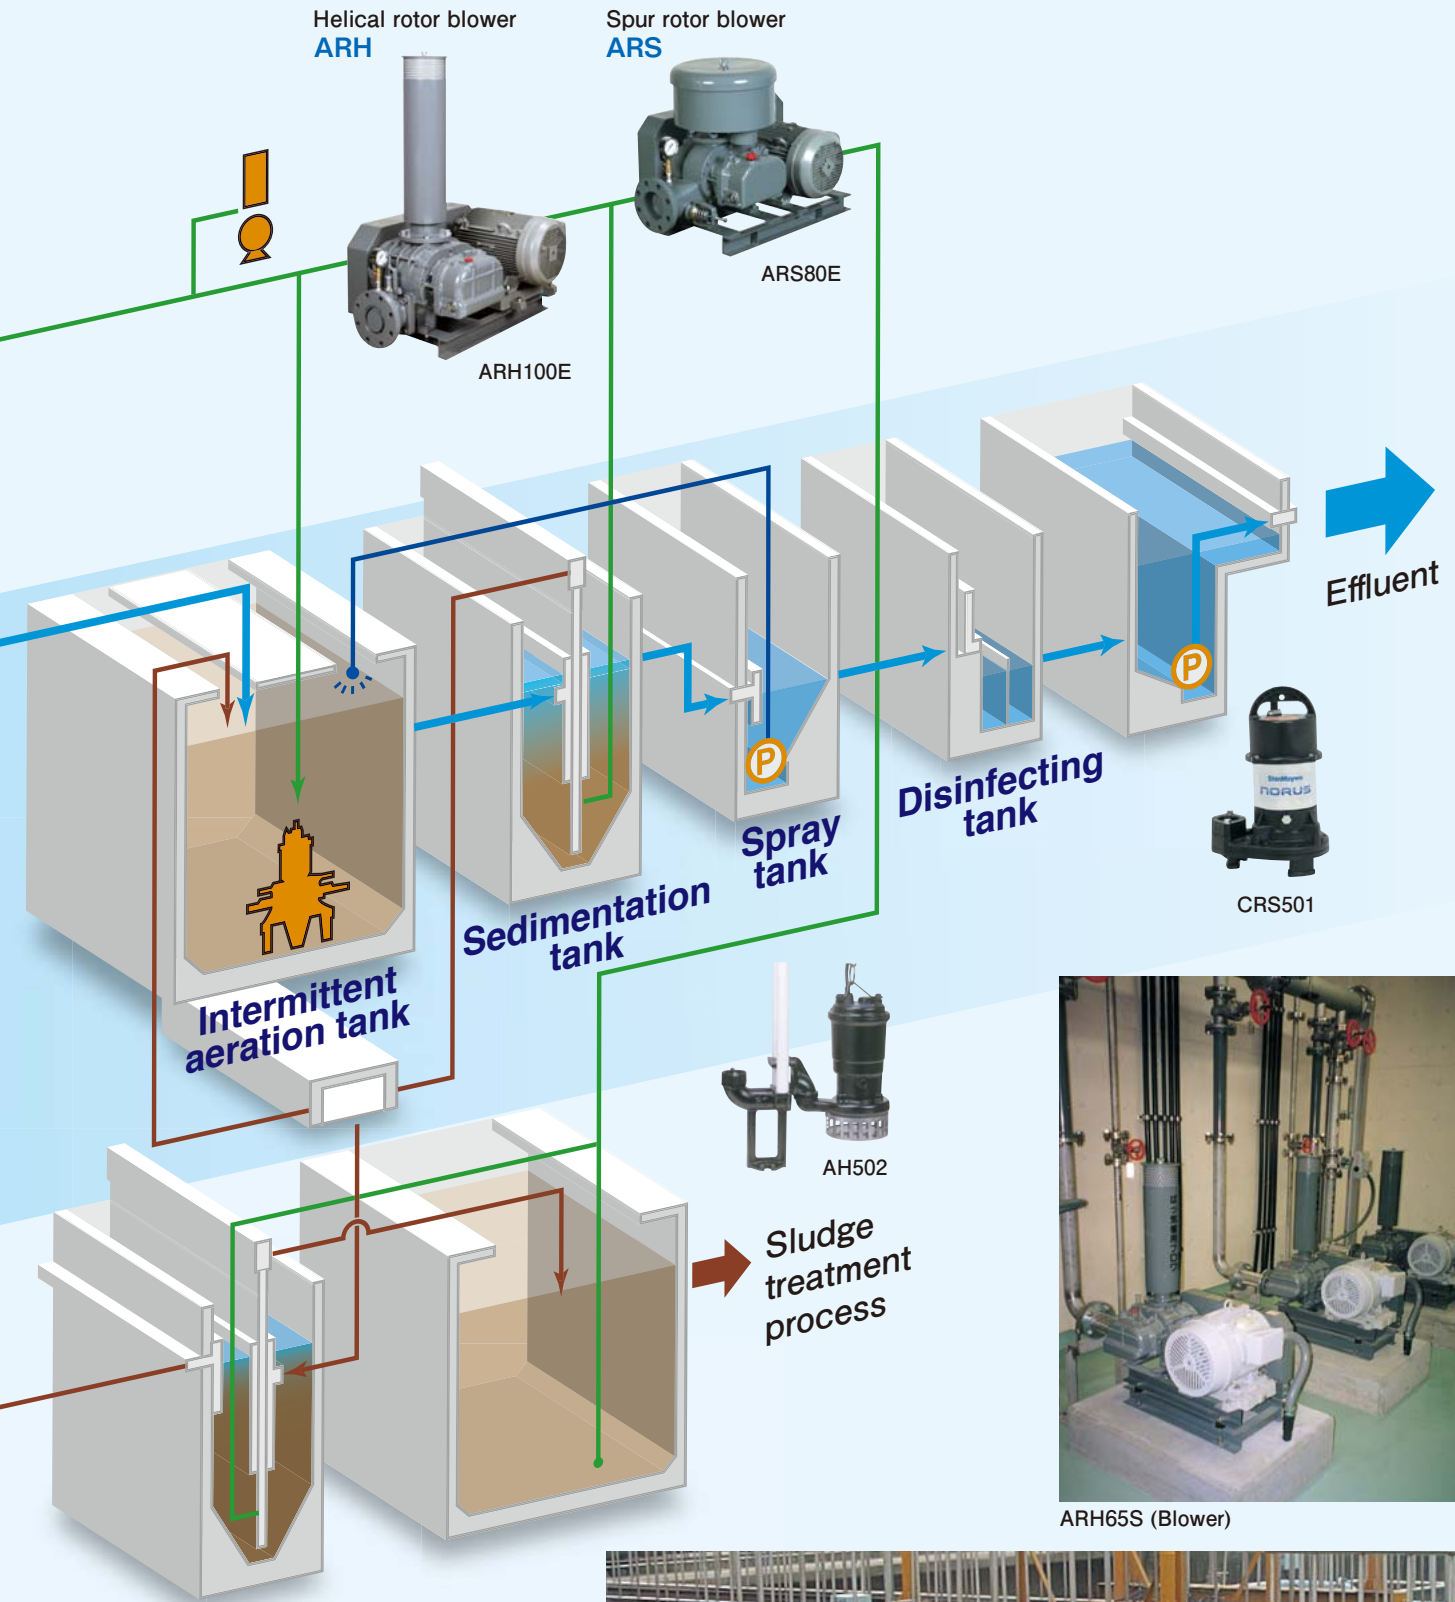

Sludge transfer pump
CNT
CWT



Dry pit type



Submersible aerator "SJ" is now in operation

ShinMaywa offers optimum equipment

Sewage Treatment

Pump station

Sewage treatment plant

- CWF**
Submersible pump with flywheel
- CWT**
Dry pit pump (Screw impeller)
- SMM** / **SML**
Submersible mixer
- CN**
Submersible pump
- ARS-E**
Blower
- SJ**
Submersible aerator
- CN**
Submersible pump

Domestic wastewater

Water garden

Onsite wastewater treatment system (at housing complex)

Onsite wastewater treatment system (at commercial or public building, hospital, etc.)

- SAF**
Aeration fountain pump
- BS**
Automatic bar screen
- CN**
Submersible pump
- ARS-E**
Blower
- JSA**
Aeration and mixing
- CR-CRS**
Submersible pump
- SM/SME**
Submersible mixer
- A-AH**
Submersible pump
- JB**
Submersible ejector for shallow tank

in various scenes.

Industrial wastewater, Water intake

Industrial wastewater treatment plant

- CNF: Submersible pump with flywheel
- SA: Mixed flow and axial flow submersible pump
- SM/SME: Submersible mixer
- SJ: Submersible aerator
- ARS-E: Blower
- CV-CVH: Submersible pump
- SB-S: Wedge wire screen
- CN: Submersible pump

Industrial park

Civil engineering and construction

Civil work site

- BU-BU-K(A): Submersible pump

Construction site

- BTR, BTR-S: Submersible pump
- BRL, BVR: Residual water pump
- MM: Peristaltic pump
- BTR-S: Submersible pump

Basement, Cable pit


Product-Application classification

(Use this as a guide for equipment selection)

Product		Classification		Models		Page	Place of use									
Product		Classification		Models		Page	Applications									
Product		Classification		Models		Page	Mixing (odder prevention)	Effluent, Transfer	Aeration	Mixing	Effluent, Transfer	Pneumatic conveying	Separation, Removal, Recovery	Commercial building, Public building	Industrial	
Submersible pump for wastewater treatment																
A series C series	Multi-vane semi-open impeller	A, AH		10 · 14 · 21	●					●						
	Channel impeller	CN·CNH, CN1, CNT, CNL, CNMJ			●						●					
	Vortex impeller	CV·CVH, CVS, CVC, CVM			●						●					
	Screw impeller	CW·CWH, CWT			●						●					
	Chopper / Cutter / Grinder	CJ, CK, CKM			●						●					
	Stainless steel submersible pump	S3A S3N, S3V			●						●					
High eff. and high solid pass capable	Non-clog scroll impeller	CNWX		12	●					●						
Lightweight submersible pump "NORUS"		CR, CRS CRC		16	●					●						
Submersible pump with flywheel		CNF, CVF, CWF		18												
Float pump		FP		21						●						
C series - large discharge size		CNX, CN, CW		19						●						
Submersible mixed and axial flow pump		SD, SA		20												
Horizontal submersible axial flow pump		SAH, SAH-L		20												
Pump-related products																
Liquid level control equipment		LC, MS, FV		11		●					●					
Submersible dewatering pump for construction work and general purpose																
2-pole motor	Lightweight, Compact	BTR, BUCF, BHV		22 · 23												
	Residual water	BRL			●											
4- or 6-pole motor	High flow rate	BU·BU-K														
	Sand pump	SN														
Self-priming residue dewatering pump		BVR				●										
Blower (Roots-type)																
Spur rotor blower		ARS/ARS-E		24					●	●			●			
Helical rotor blower		ARH-S / SP·ARH-E / EP		25	●					●	●		●			
Submersible helical rotor blower		RB-H		26	●					●	●					
Submersible mixer																
High speed submersible mixer		SM/SME, SM-W/SME-W, SME-D		28	●					●						
Medium speed - Low speed submersible mixer		SMM, SML		29												
Aeration mixer		SME-R			●					●						
Aeration and mixing																
For wastewater treatment	Self-aspirating aerator	JSA		30	●				●	●						
	Submersible aerator	SJ, SJL, SU		31						●	●					
	Submersible ejector	J·JF·JA·JAF			●					●	●					
Submersible ejector for shallow tank		JB·JBF		31	●					●	●					
Aeration fountain pump		SAF		30												
Screen																
Automatic bar screen		BS, VS		27										●		
Wedge wire screen		S·SB												●		

A / C series

Depending on the situation of your application, you can choose installation type, impeller type, etc. and select optimum pump from a wide variety of models.

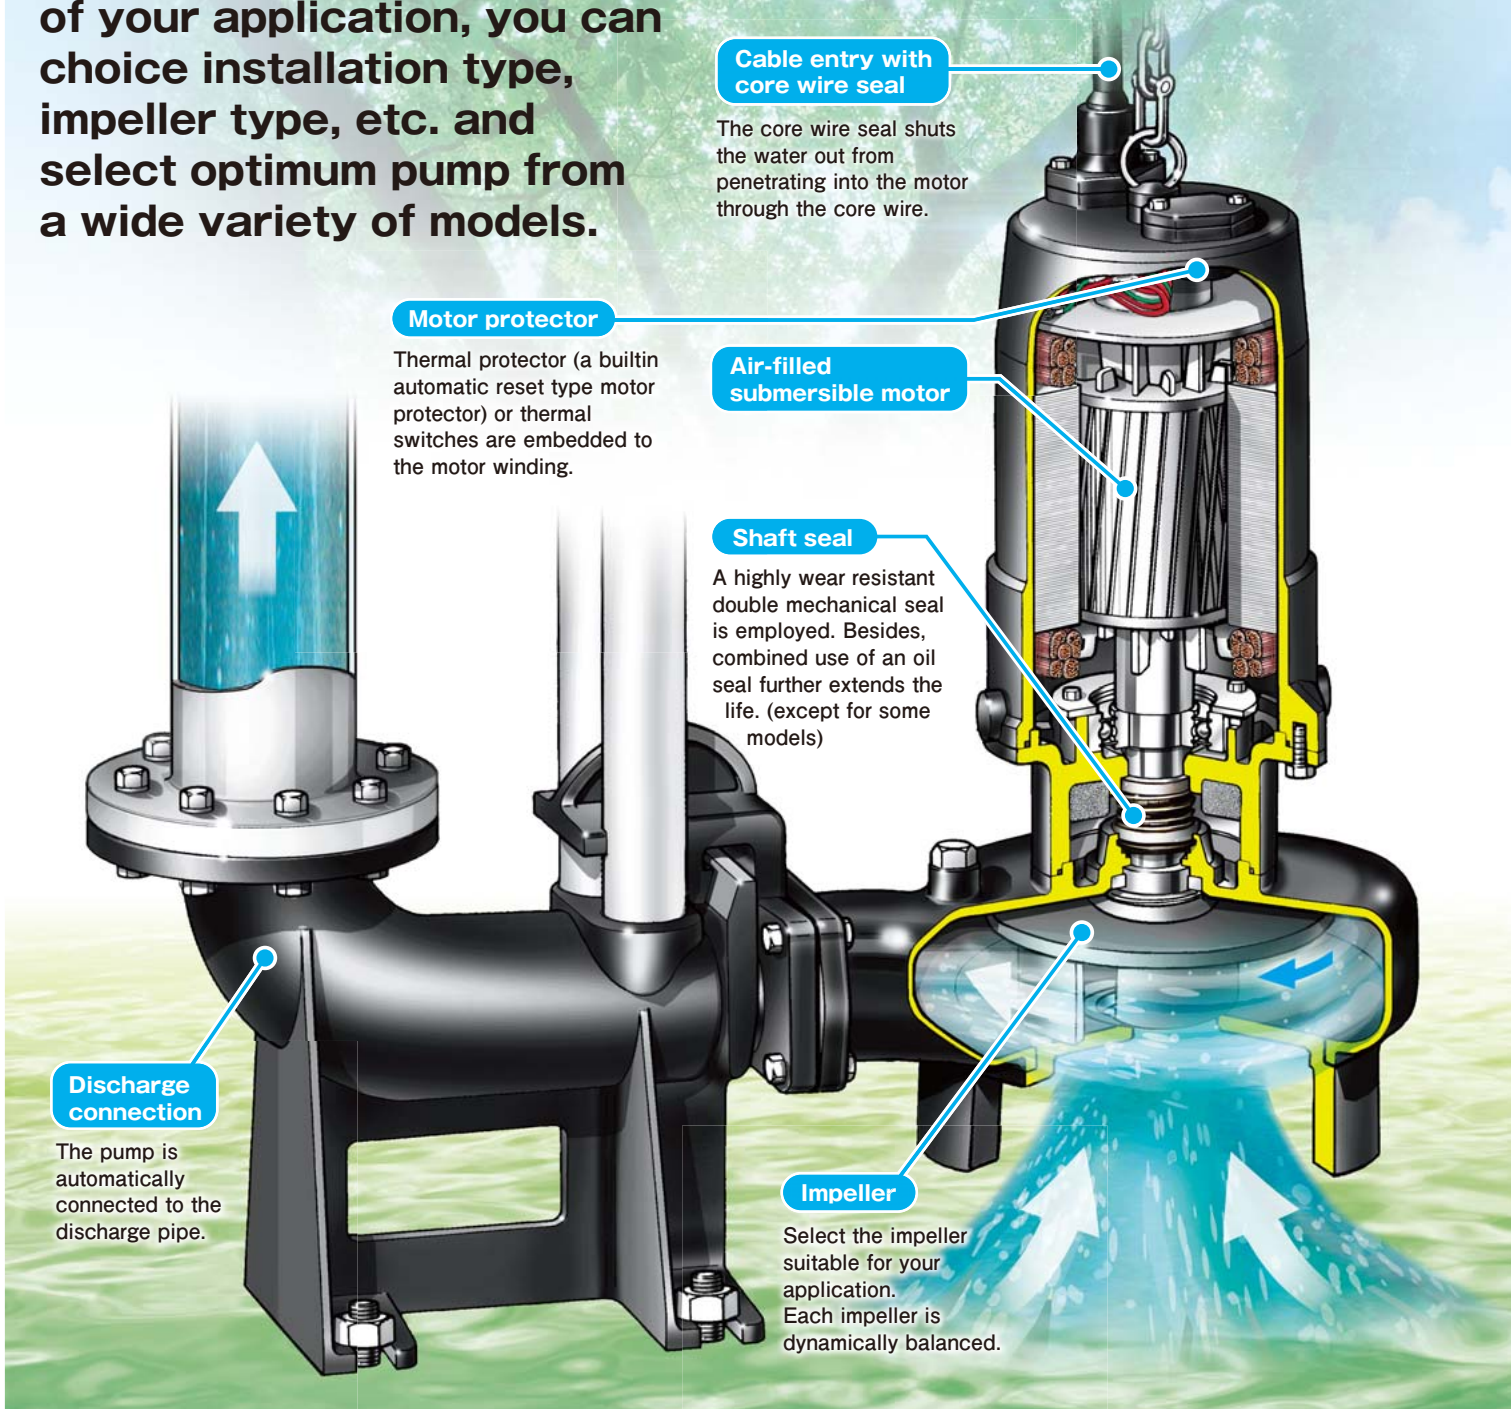

Cable entry with core wire seal

The core wire seal shuts the water out from penetrating into the motor through the core wire.

Motor protector

Thermal protector (a built-in automatic reset type motor protector) or thermal switches are embedded to the motor winding.

Air-filled submersible motor

Shaft seal

A highly wear resistant double mechanical seal is employed. Besides, combined use of an oil seal further extends the life. (except for some models)

Discharge connection

The pump is automatically connected to the discharge pipe.


Impeller

Select the impeller suitable for your application. Each impeller is dynamically balanced.

Features


Cable entry with core wire seal

As the cable core wire consists of multi stranded conductor, water may penetrate into the motor by the capillary phenomenon when cable sheath or insulation is damaged or when the end of the cable is submerged. Therefore, a certain part of insulation of each core wire is peeled, and sealed with rubber to prevent water penetration.





























Mechanical Seal




Employing double mechanical seal with high wear resistance material to prevent water penetration into motor housing. Also, in combination with employing the oil seal, life time of mechanical seal shall be extended.



Meet the wide range of needs from various variations.

<p>Non-clog scroll impeller</p> 	<p>CNWX</p> 				
<p>Channel impeller</p> <p>Semi-open type Closed type</p>  <p><small>*This figure is Semi-open type</small></p>	<p>CN-CN1</p> 	<p>CN1</p> 	<p>CNT</p> 	<p>CNL</p> 	<p>CNMJ</p> 
<p>Chopper / Cutter / Grinder pump</p> <p>Chopper Cutter Grinder</p> 	<p>CJ Chopper</p> 	<p>CK Cutter</p> 	<p>CKM Grinder</p> 		
<p>Vortex impeller</p> 	<p>CV-CVH</p> 	<p>CVS</p> 	<p>CVC</p> 	<p>CVM</p> 	
<p>Screw impeller</p> 	<p>CW-CWH</p> 		<p>CWT</p> 		
<p>Multi-vane semi-open impeller</p> 	<p>A</p> 		<p>AH</p> 		
<p>Stainless steel submersible pump</p> <p>All wetted parts for this series are made of stainless steel. We offer three types of impeller for discharging wastewater and sewage from food plants, hospitals, etc.</p>	<p>Multi-vane semi-open impeller S3A</p> 	<p>Channel impeller S3N</p> 	<p>Vortex impeller S3V</p> 		

Liquid level control equipment - All models are non-mercury structure for earth environment.

<p>LC Level regulator</p> <p>Features Useful for potable water, wastewater and sewage containing the suspended solids. Hardly affected by corrosion or rust even if it is immersed in a corrosive liquid for a long time.</p> 	<p>MS Mini switch</p> <p>Features Useful for wastewater and sewage containing a few suspended solids. The MS is available in two types, MS11 (single float) and MS21 (double floats).</p> 	<p>FV Oval float</p> <p>Features Useful for the fresh water as well as wastewater not containing suspended solids. A single FV is able to control both the upper and lower liquid levels.</p> 
---	---	---

High Efficiency and High Solid Passage Capability

Non-clog Scroll Submersible Pumps

The CNWX series of non-clog submersible pumps have a high pass-through capability that exceeds that of current submersible pumps.

High efficiency and high solid passage capability

CNWX

Discharge size: 50 - 100mm
Rated output: 0.75 - 7.5kW

Solid size
100%* of
discharge
size

*Excluding some explosion-proof models.


Discharge connection

The pump is automatically connected to the discharge pipe.

CNWX with flywheel to prevent water hammer or air-cooled submersible motor type for dry-pit operation are also available as an option.

Air relief valve

Prevents airlock by exhausting any air remaining in the pump housing.

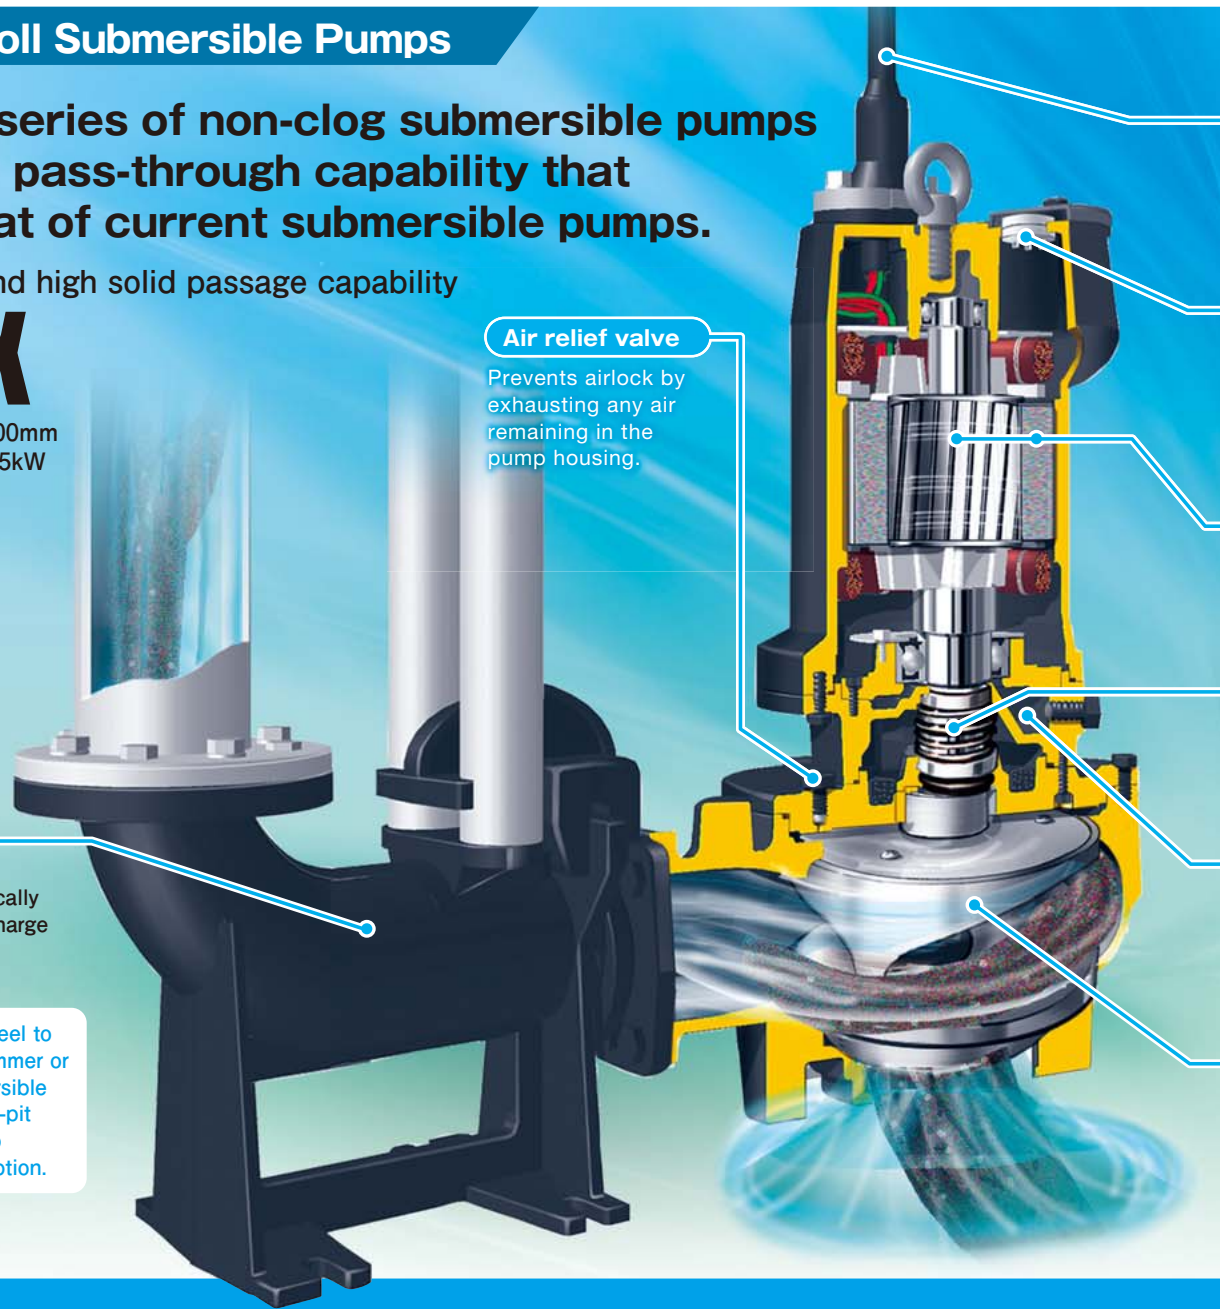

Case study

Apartment pump station

Barton Court, UT

Reduce clogging problem and electricity consumption



Competitor's cutter pump

Cutter pump (4-pole, 4.3HP, 1-phase)	
Problem	Clogging every month
Solids	Feminine sanitary products, etc.

CNWX (4-pole, 3" solid, 3HP, 3-phase with VFD)



CNWX Non-clog scroll

Clogging problem solved, no clogging for over 1 year, reduced maintenance cost and electricity cost.



Apartment pump station

El Monte, CA

Reduce clogging problem

Solid handling pump (2HP)	
Problem	Clogging every month
Solids	Feminine sanitary products, Rags, etc.

Grinder pump (2HP)
Grinder pump installation did not reduce clogging.



Grinder pump clogging with rags


CNWX (3" solid, 2HP)

No clogging for over 6 months.



CNWX

Innovative pass-through technology

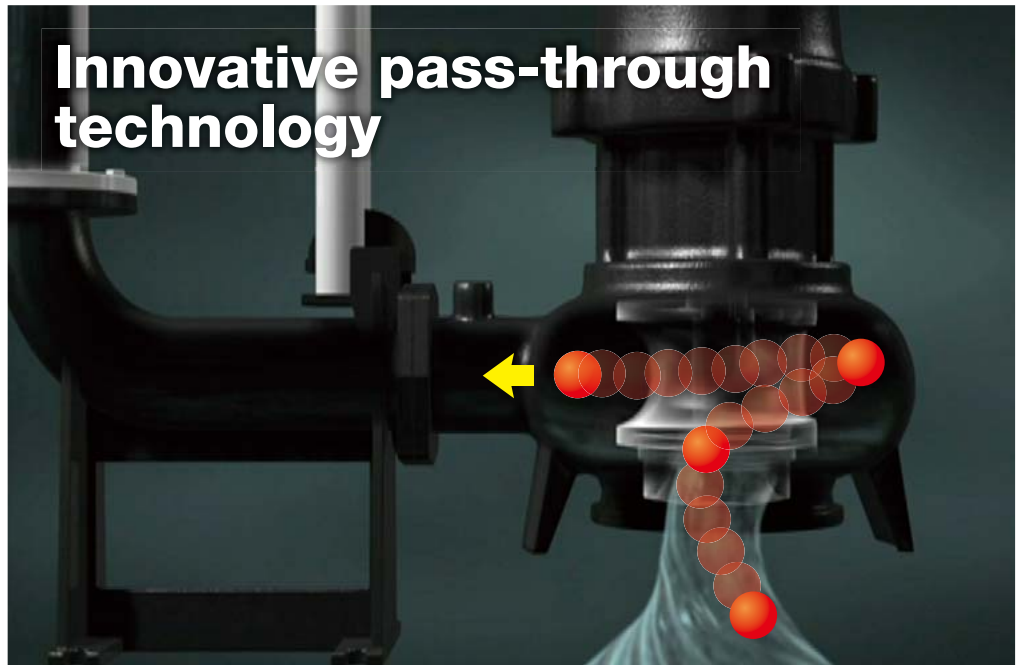

Cable entry with core wire seal

The core wire seal shuts the water out from penetrating into the motor through the core wire.

Motor protector

Thermal protector (a builtin automatic reset type motor protector) or thermal switches are embedded to the motor winding.

Air-filled submersible motor

Shaft seal

A highly wear resistant silicon carbide double mechanical seal is employed.

Seal fail chamber & Leakage detector


Protects the motor and bearings from damage in the event of mechanical seal failure.

Impeller


Non-clog scroll impeller, which has high efficiency and high solid passage capability, is employed.

Highly effective passing

Pass-through tests

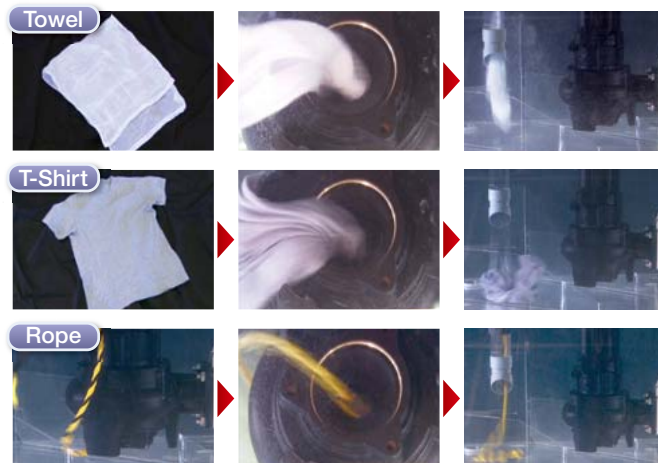


Significantly reduces the clogging, plugging and entangling of fibrous matters allowing for less downtime and lower maintenance costs.



Quick, easy maintenance

The pull out design allows for easier and more efficient inspection and part replacement. The pump unit can be detached without removing the impeller from the motor.



Applications

The CNWX series are the pumps of choice for the following applications

- Pump stations for sewage and wastewater collection systems.
- Raw water transfer at pump stations.
- Drainage from buildings.
- Handling of raw water in wastewater treatment plants.
- In the process for industrial wastewater treatment systems.
- Drainage of wastewater containing debris such as solids and fibrous materials.



Retirement home pump station

Burlingame, CA

Reduce clogging problem



Solid handing pump (3" solid, 2HP)

Problem	Clogging multiple times per week
Solids	Diaper, Feminine sanitary products, Rags, etc.

CNWX (3" solid, 2HP)

No clogging for over 3 months.



CNWX



3-inch Passage and Self-cleaning with Chopper

New Advanced Technology!

Improved pass-through capability, solids passage up to 3-inch (80mm) in diameter. Semi-open channel impeller has helix shaped channel, and brand-new chopper mechanism.

3-inch passage and self-cleaning with chopper

CNMJ

Discharge size: 80, 100mm
Rated output: 1.5 - 7.5kW



■ CNMJ Technology

Conventional pumps

CNWX

(High passing with helix)



Combine those Merit


CN

(Simple design with semi-open impeller)



CJ

(Chopper)



CNMJ Brand new pumps

■ Improved pass-through capability

Impeller has a helix formed passage based on CNWX.

■ Solid passage up to 3-inch (80mm) in diameter



Impeller is much better in solid passage diameter than ever before.

■ Simple design

Impeller is single vane semi-open impeller like CN.

■ Brand new chopper mechanism


CNMJ is equipped with brand new chopper mechanism, that advanced than CJ.

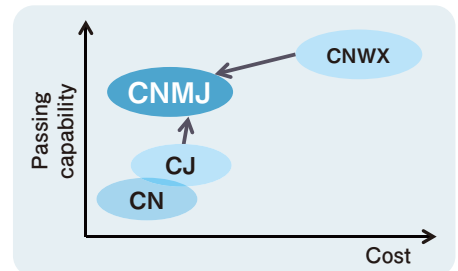

Pass-through test


★★★★ = Excellent
★★★ = Very good
★★ = Good
★ = Poor/Normal

	Tennis ball 66mm dia.	Sanitary items	Plastic bag	Steel can OD53mm×L105mm	Plastic bottle 500ml
CNWX	★★★★	★★★★	★★★★	★★★★	★★★★
CNMJ	★★★★	★★★★	★★★★	★★★★	★★★★
CN/CJ	★	★★	★★	★	★

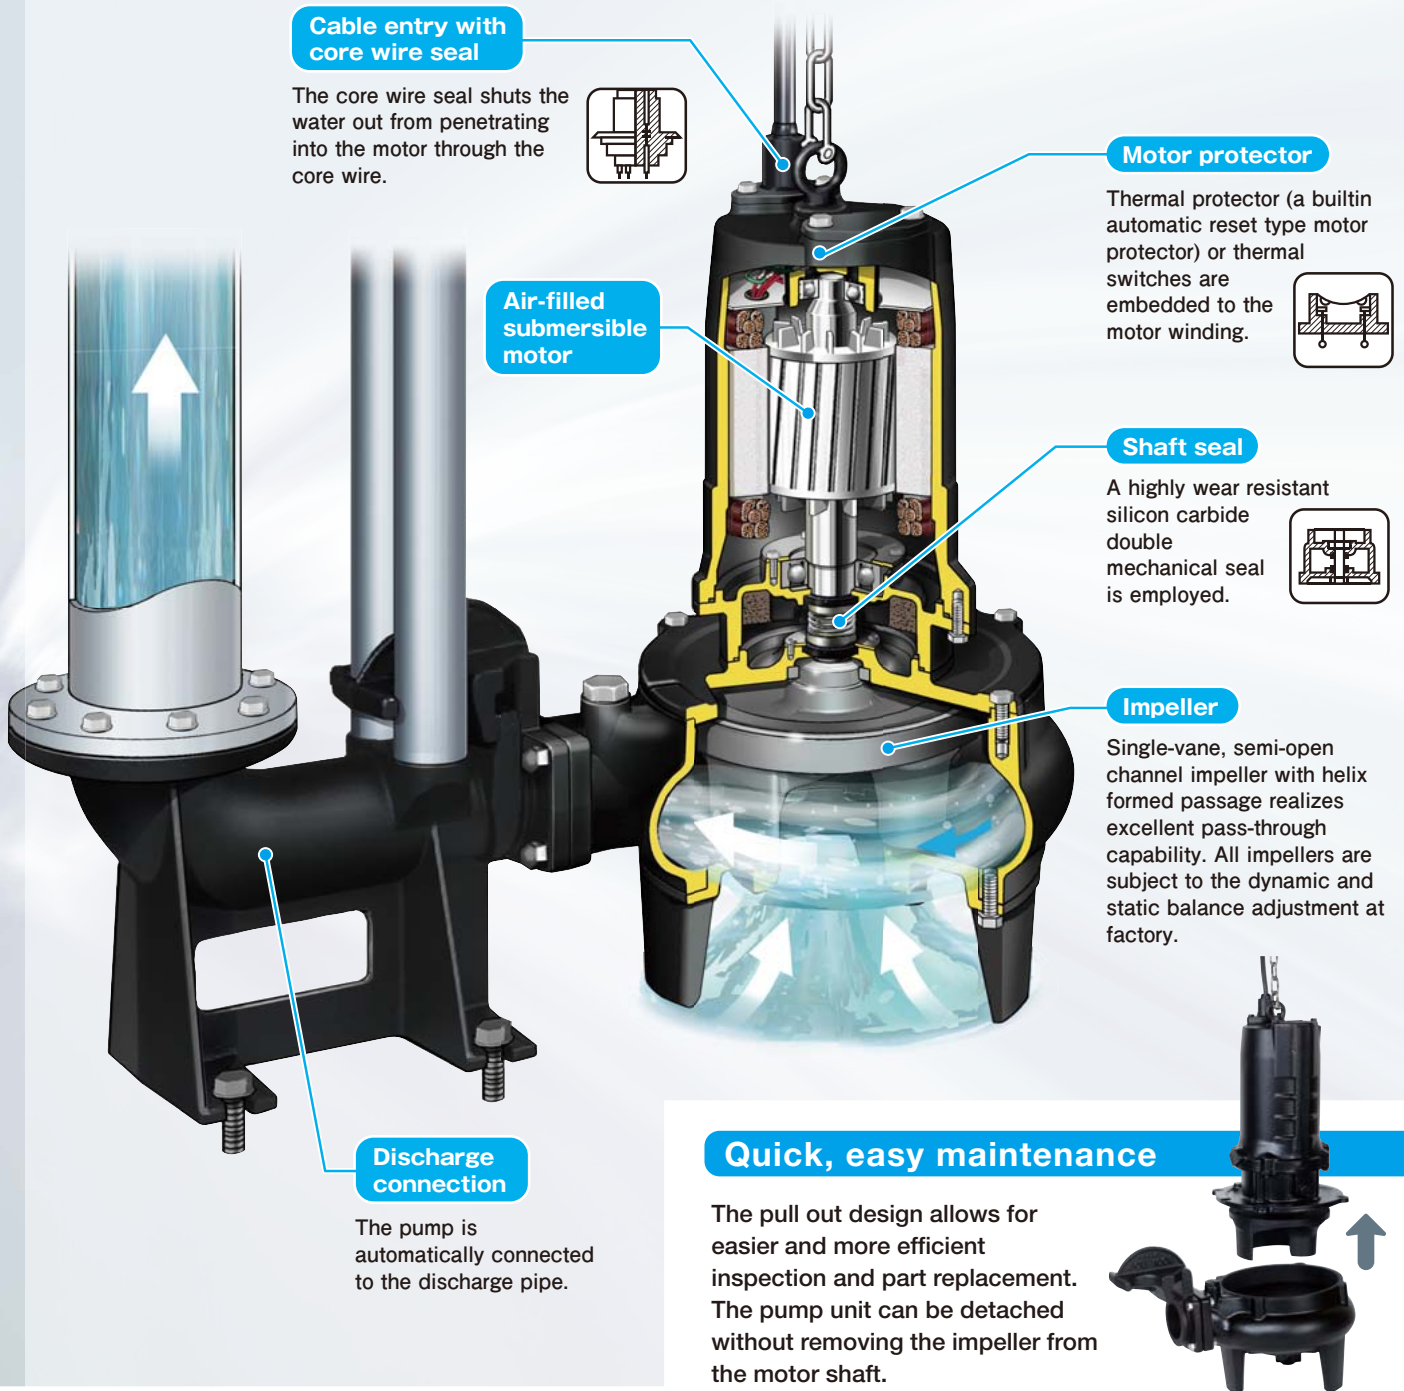

Chopper mechanism

Brand new chopper mechanism using chopper plate.

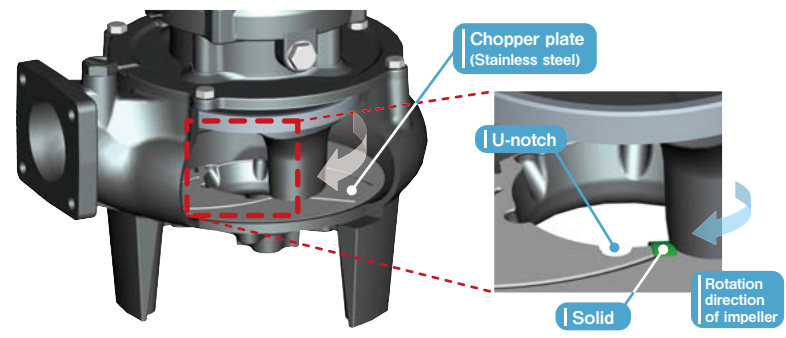

Pump model	Pass-through test	Remarks
CNMJ	★★★★	·Brand new chopper mechanism ·Improved wear resistance
CJ	★★	Chopper mechanism
CN	★	Standard type

CNMJ overcome weakness about pass-through capability of semi-open impeller by the brand new chopper mechanism.

Lightweight Submersible Pump NORUS

New Generation of Pump NORUS!

The combination of "high-functional resin" and "stainless steel" makes the pumps lighter in weight and greater in toughness.

NORUS

series

One-point lifting for easy installation

The pump can be easily hung up and down using a single hole in the handle.

Cable entry with core wire seal

The core wire seal shuts the water out from penetrating into the motor through the core wire.

Anti-creep (AC) bearing for intermittent operation

Air-filled submersible motor dedicated for NORUS

Air relief valve

Prevents airlock by exhausting any air remaining in the pump housing. (excluding 0.1 and 0.15kW models)

High pumping capability with guide rail installation

Lineup of guide rail installation type for easy installation and maintenance. Anti-floating mechanism is provided for connection. Also, in combination with special gasket to prevent water leakage so that pumping loss is prevented.



Seamless stator housing structure

TORNADO FIN

Shaft seal

A highly wear resistant double mechanical seal is employed.

Shaft material: 316 stainless steel as standard

(Applicable: CR&CRS 0.25 - 0.75 kW)

Rubber protector

A rubber protector is provided to prevent damage to the FRP tank and so on.

Wear resistant vortex impeller which is hardly clogged with foreign matter

Model CR and CRS employ a vortex type impeller, since the vortex impeller reduces the tangling of fibrous matter. The CR series is comparable or superior in pumping performance to conventional vortex pumps. The impeller is made of high-functional resin having excellent wear resistance. It is more than 100 times as strong as impellers made of ABS resin. Therefore, the "NORUS" can be used in raw water containing considerable amounts of solids.



Impeller made of high-functional resin
After 200 hours of operation
Loss of weight: 3.3%



Impeller made of ABS resin
After 24 hours of operation
Loss of weight: 46%

*Test condition: Pump was operated in 600 liters of water containing 120kg of sand.


Features

Tornado fin

Extend service life of the mechanical seal.

(Applicable : CR & CRS 0.25 - 0.75kW)

Tornado fin is provided in the mechanical seal chamber to significantly reduce the temperature rise and degradation of the mechanical seal. Therefore, more long life can be achieved.

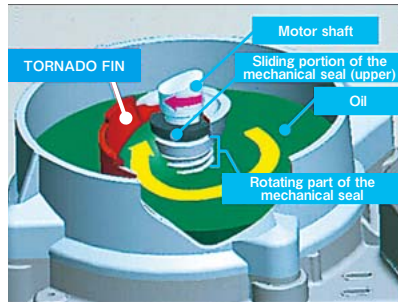


Seamless stator housing structure

Eliminating weld joint and enlarging seal width significantly improved corrosion resistance.


(Applicable : CR & CRS 0.1 - 0.75 kW)

Seamless stator housing, achieved by an integrated pressing process, has eliminated weld joint to prevent rusting. Furthermore, a larger gasket seal width prevents the crevice corrosion.

Upper motor seal



Lower motor seal



Durable motor for operation in the air at low water level

Adopting a motor with lowering temperature rise allows continuous operation in the air for 30 minutes. With this feature of lowering temperature rise, "NORUS" can keep the bearing at a low temperature and extend its service life.

Excellent corrosion resistance

304 stainless steel and high-functional resin are also used for the stator housing and wetted part, offering better corrosion resistance. As a result, the "NORUS" pumps achieves good corrosion resistance even under severer working conditions. In addition, the "NORUS" is hardly rusted, so that ordinary maintenance is enough with simple washing.

3 types to choose according to the application

High pass-through capability

High solid pass-through model materialized as a result of giving priority to the smooth passing of solids.

CR



Discharge size: 50 - 80mm
Rated output: 0.15 - 2.2kW



Universal type

Universal model with improved pass-through capability and pump performance available.

CRS



Discharge size: 32 - 80mm
Rated output: 0.1 - 2.2kW



High head with closed impeller

High pump head with closed impeller.

CRC



Discharge size: 40 - 80mm
Rated output: 0.4 - 2.2kW



Applications

- For handling raw water at onsite wastewater treatment systems, etc.
- For draining domestic wastewater.
- For returning sludge.

Applications

- For deforming and discharging treated water at wastewater treatment plants.
- For draining stormwater from roads or underpasses.
- For draining wastewater from commercial buildings, factories, garages or basements.

Auto-operation


CR
CRS
CRC - D



With the two float switches, pump runs and stops automatically repeated according to the water level. Because the operation radius of the float switch is short, it can be installed even in a narrow tank.

CR / Discharge size: 50mm Rated output: 0.15 - 0.75kW
CRS / Discharge size: 32 - 80mm Rated output: 0.1 - 2.2kW
CRC / Discharge size: 40 - 80mm Rated output: 0.4 - 2.2kW

Operating sequence

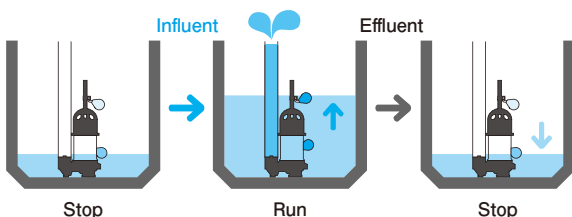

Auto-alternate operation


CR
CRS
CRC - DW



In accordance with the water level, two pumps automatically repeat run / stop alternately. Also, when water level abnormally rising, two pumps automatically run simultaneously. No need for level sensor, realize simple package including control panel.

CR / Discharge size: 50mm Rated output: 0.15 - 0.4kW
CRS / Discharge size: 32 - 80mm Rated output: 0.1 - 2.2kW
CRC / Discharge size: 50 - 80mm Rated output: 1.5 - 2.2kW


Operating sequence

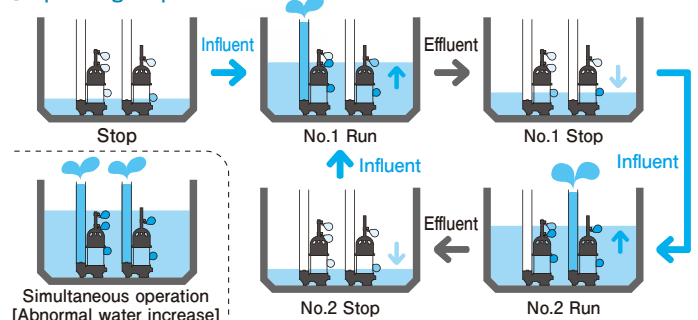


Submersible Pump with Flywheel

The pump incorporates a flywheel which increases the inertia force, and absorbs drastic decline in flow rate at pump stop which causes water hammer.

Mechanism of water hammer

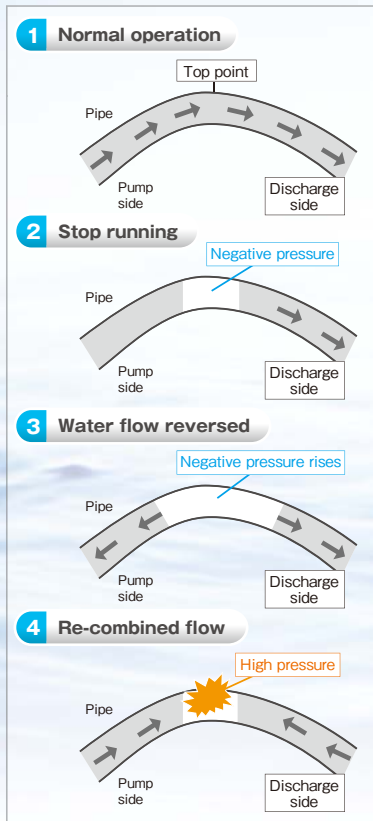

Comparison of the pressure (pump head) changes for submersible pumps with flywheel and without flywheel

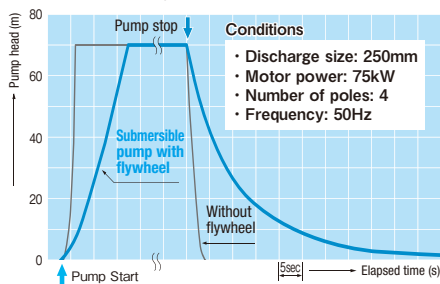

Application

- For pump station in the sewerage systems.
- Intake of agricultural water, flooding protection, and irrigation.
- For industrial water intake. When water hammer occurs or may occur for the above applications.

Cable entry with core wire seal

The core wire seal shuts the water out from penetrating into the motor through the core wire.

Air-filled submersible motor

Forced-cooling system

(excluding model CNF80, 100 & 1502)
Motor is cooled continuously by a part of pumped liquid while the pump in operation.

Motor protector

Thermal protector (a built-in automatic reset type motor protector) or thermal switches are embedded to the motor winding.

Shaft seal

A highly wear resistant double mechanical seal is employed.

Flywheel

Increases the pump inertia to absorb drastic decline in flow rate which causes water hammer.

Impeller

Select the impeller suitable for your application. Each impeller is dynamically balanced.

Leakage detector

When water intrudes to the motor housing, it alerts to prevent insulation deterioration of the motor.

- CNF80, 100 & 1502: Electrode
- Other models: Float switch

*This figure is Channel impeller closed.

Channel impeller

CNF

Discharge size: 80 - 500mm
Rated output: 5.5 - 75kW



Vortex impeller

CVF

Discharge size: 80 - 150mm
Rated output: 5.5 - 22kW



Screw impeller

CWF

Discharge size: 80 - 150mm
Rated output: 5.5 - 22kW




C-series Large Discharge Size

Large-sized Forced-cooling and Natural-cooling

Development of 3 types (High, Medium and Low head) of impellers for each output.

Expanded high efficiency range

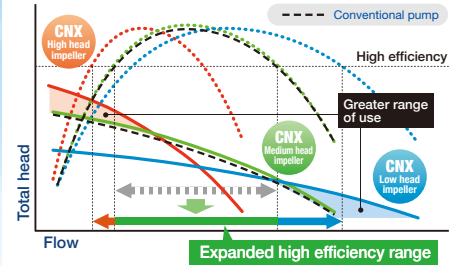

- High efficiency over a wide range
- 3-inch solid passage diameter
- Compact design achieved with 4-pole motor

Channel impeller

Closed loop cooling type

CNX


Discharge size:
150 - 300mm
Rated output:
11 - 37kW



Natural cooling type

CNX

Discharge size:
150 - 300mm
Rated output:
5.5 - 37kW

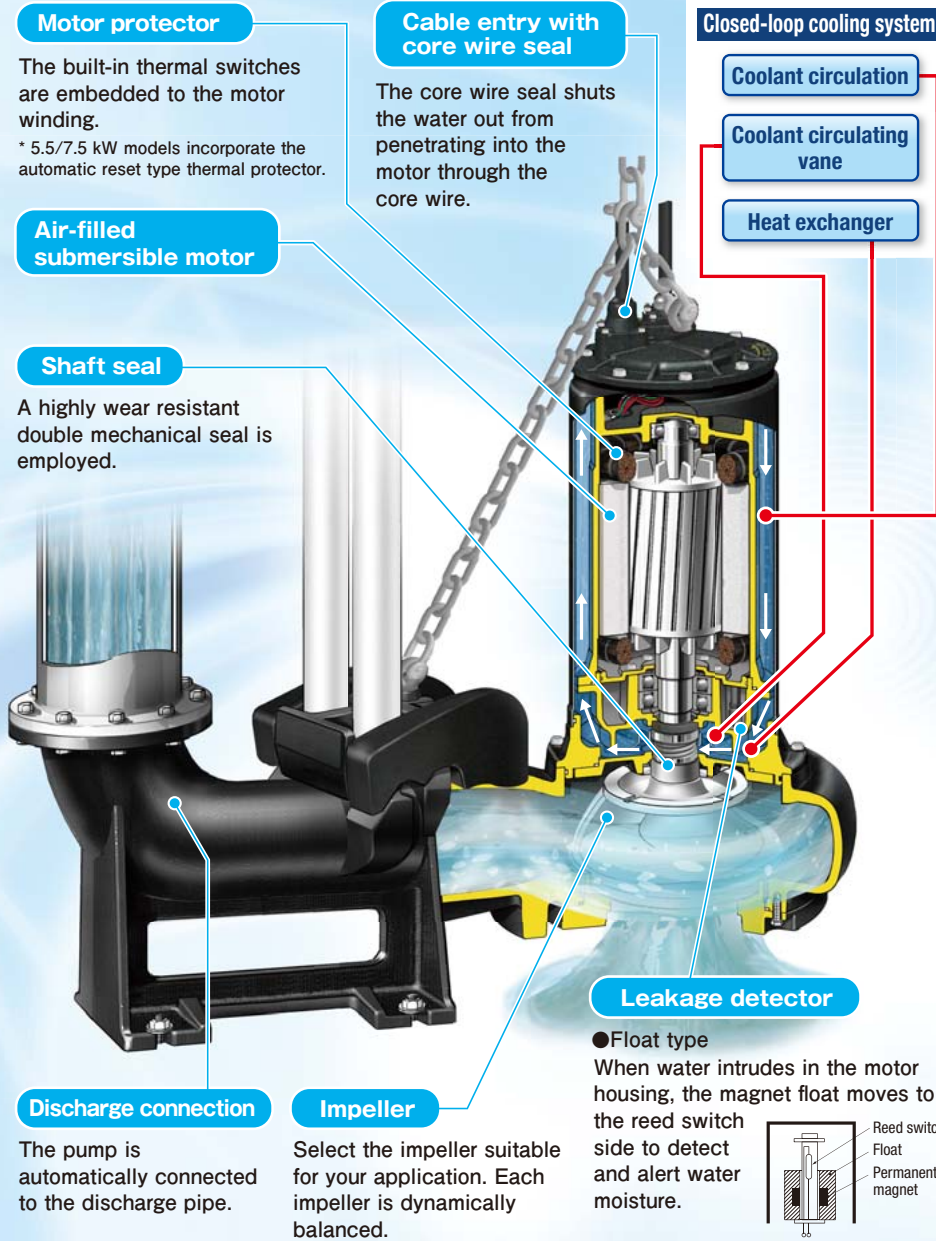

Application

- For pump stations in the sewage / wastewater and stormwater collection systems.
- For wastewater transportation and other process at sewage / wastewater treatment plant.
- For storm surge and flood control.
- For agricultural water intake and irrigation.
- For effluent control at factories and large commercial complexes.
- For industrial water intake.

Channel impeller

Large-sized forced-cooling

CN

Discharge size: 200 - 800mm
Rated output: 7.5 - 250kW



Large-sized natural-cooling

CN

Discharge size: 200 - 400mm
Rated output: 7.5 - 45kW



Screw impeller

Large-sized forced-cooling

CW

Discharge size: 200 - 300mm
Rated output: 11 - 55kW



*Please contact us for over 500mm, 75kW.

Submersible Mixed and Axial Flow Pump

Easy installation,
no building,
realize economical
high volume
pumping and
drainage station.

Submersible mixed flow pump

SD

Submersible axial flow pump

SA

Discharge size: 300 - 1,000mm
Rated output: 11 - 150kW

Air-filled submersible motor

Leakage detector

When water intrudes to the motor housing, it alerts to prevent insulation deterioration of the motor.

Impeller

High efficient mixed or axial flow impeller is employed.

Shaft seal

A highly wear resistant double mechanical seal is employed.

Cable entry with core wire seal


The core wire seal shuts the water out from penetrating into the motor through the core wire.

Discharge connection

The pump is automatically connected to the discharge pipe.

Motor protector

Thermal switches are embedded to the motor winding.

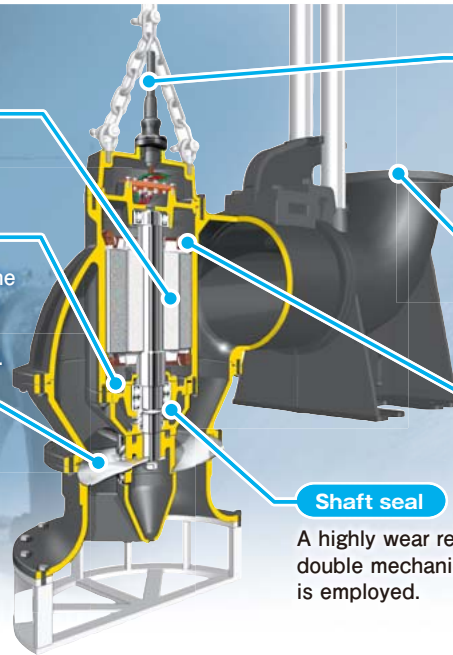

Guide rail installation (P-type)

Possible to remove the pump from the tank without pumping out the water.



Flange connection (F-type)

Install at the bottom of tank and connect to piping with flange.




Column installation (C-type)


Just by placing the pump inside the column (pipe), it is automatically aligned and fixed to the base.




Installation example



● Over flow type



● Anti-backflow type



● Pressure flow type

Horizontal submersible axial flow pump

For gate use

SAH


Discharge size: 300 - 800mm
Rated output: 7.5 - 75kW



For low water level

SAH-L

Discharge size: 400 - 900mm
Rated output: 7.5 - 90kW

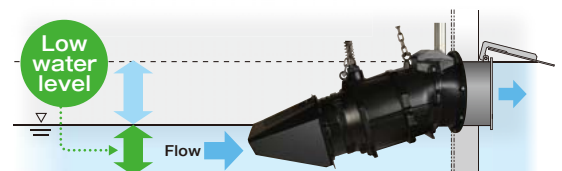

Applications

- Low water level operation
- Lightweight design
- Adopt the guide rail installation



Dry Pit Pump (Amphibian type)

Ideal for waterproofing of pump stations!
 Continuous operation is possible even in case of submersion.
 In addition, it saves maintenance and space.

Motors with several types of cooling (Submersible motor)

Air cooling, forced cooling and internal cooling types are available.
 * The cooling type differs depending on discharge size, rated output, etc.

Impeller and motor shaft are directly connected

No intermediate bearing saves maintenance and space.

Select impeller type for your application


Channel impeller (CNT) and screw impeller (CWT) are available. Select according to the situation of your application.



Channel impeller (CNT)




Screw Impeller (CWT)

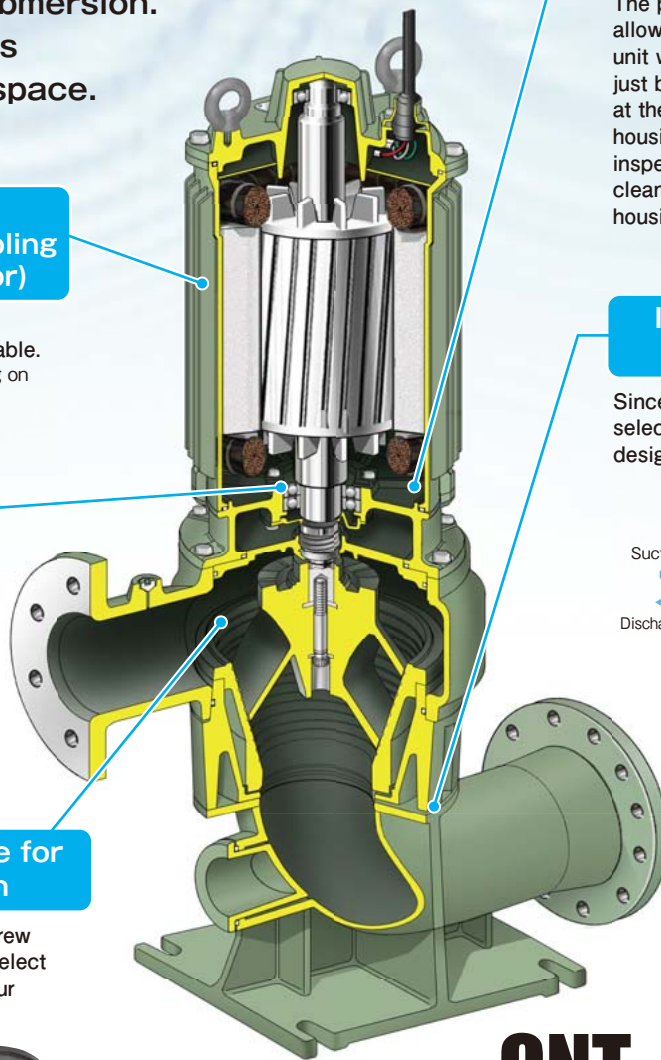


Easy maintenance

The pull out structure allows to detach motor unit with impeller attached, just by removing the nuts at the top of the pump housing. So it is easy to inspect the impeller and clean inside the pump housing.



Increasing freedom of facility design

Since the discharge direction can be selected every 90°, piping layout can be designed freely.



* For 45° discharge angle, please contact us.

CNT
CWT

Discharge size: 65 - 150mm
 Rated output: 1.5 - 22kW



Others

Float pump



Powerfully collecting flotage and scum on the water.

FP Discharge size: 50, 80mm
 Rated output: 0.75, 1.5kW


Applications

- Returning scum
- Collecting skimming water
- Collecting and returning other flotage on the water surface



Dewatering Pump, Sand Pump

Light and Compact, yet Tough.

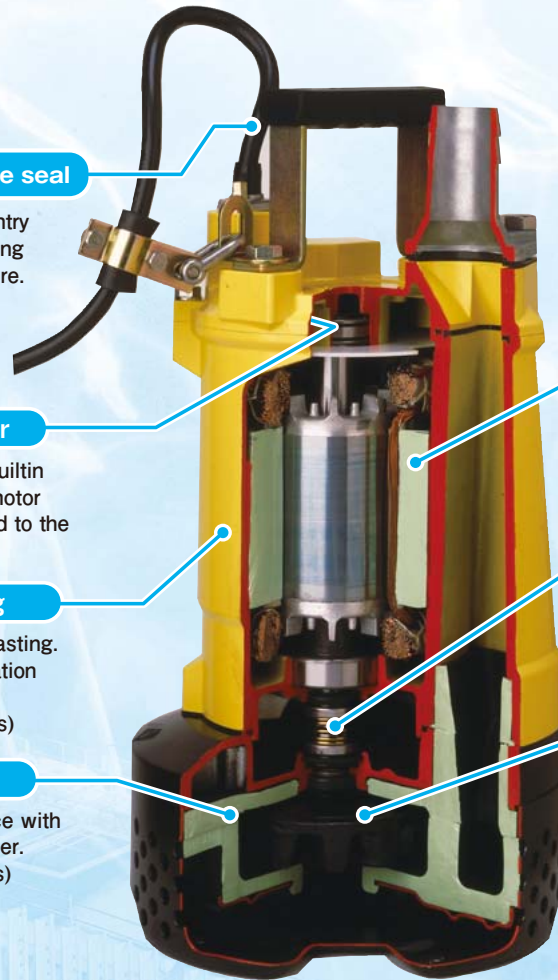

Cable entry with core wire seal

The core wire seal at the cable entry shuts the water out from penetrating into the motor through the core wire.

Motor protector

Thermal protector (a builtin automatic reset type motor protector) is embedded to the motor winding.

Stator housing

Aluminium alloy die-casting. Considering heat radiation and saving weight. (BTR/BRL/BVR series)

Pump housing

Ensure wear resistance with special synthetic rubber. (BTR/BRL/BVR series)

Air-filled submersible motor

Shaft: Stainless steel

Mechanical seal

A highly wear resistant double mechanical seal is employed.

Impeller

Ensure wear resistance with high grade material.

2-pole dewatering pump

BTR

BTR-S/T

Discharge size: 40, 50mm
Rated output: 0.25 - 0.75kW

BTR

Discharge size: 50 - 100mm
Rated output: 1.5 - 5.5kW

Applications

- Dewatering spring water at construction sites.
- Water intake or drainage for agricultural purpose.
- Dewatering from basements or cable pits.
- Household, gardening, etc.



Impeller



BTR-S/T:
0.25 - 0.75kW



BTR:
1.5 - 5.5kW

Submersible pump for residual water

Drainage powerfully even at the extremely low water level, sufficient flow with residual water pump.

BRL

Discharge size: 25, 50mm
Rated output: 0.4kW

Applications

- Dewatering residual water in tanks, swimming pools, etc.
- Dewatering spring water or sump from construction sites, underpass, etc.



2-pole dewartarig pump

High-durability and ease of operation in narrow places and with low water levels. Suitable for harsh construction site.

BUCF

Discharge size: 80 - 200mm
Rated output: 3.7 - 22kW

Applications

- Dewatering spring water at construction site.
- Water intake or drainage for agricultural purpose.
- Drainage at basement, underpass or cable pit and etc.



Hose coupling

Flange connection

2-pole trash pump

High durability against sand lock. Handy trash pump with vortex impeller.

BHV

Discharge size: 50mm
Rated output: 0.4kW

Applications

- Dewatering spring water at construction sites.
- Water intake or drainage for agricultural purposes.
- Drainage from basements cable pit.
- Temporary water supply and drainage at home, etc.



4- or 6-pole dewatering pump

Energy efficient type with reduced power consumption, using motor with enough margin against the load.

BU

Discharge size: 200 - 350mm
Rated output: 15 - 55kW

BU-K

(equipped with an agitator)

Discharge size: 150, 200mm
Rated output: 5.5 - 22kW

Applications

- Dewatering spring water at construction sites of dams, sewer systems, tunnels, rivers, etc.
- Water intake or drainage for agricultural purpose, etc.



4- or 6-pole sand pump

Powerful for drainage of mud containing a lot of sands.

SN

Discharge size :
80 - 200mm
Rated output :
3.7 - 37kW

Applications

- Drainage of sand basin and sewage tank containing sand at sewage treatment plants.
- Dewatering muddy water at dredging work, civil engineering work, etc.
- Removing mill scales and other sandy sediments at iron works or cement plants.



Self-priming residue dewatering pump


Powerful suction and discharge of the pooled water in various fields. Continuous operation is possible while suctioning water with air.

BVR

Discharge size: 25mm
Rated output: 0.4kW

Applications

- Dewatering residual water at construction sites, pits, ditches and manholes.
- Removing sediments in ponds for aquarium fish.
- Dewatering rinse water in factories, large tanks, special purpose vehicles, etc.

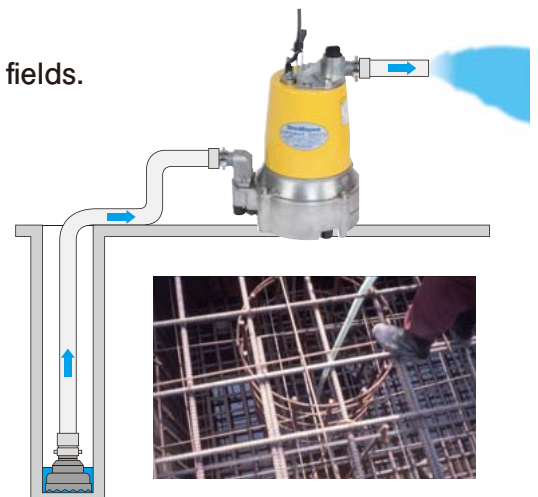

Blower (Roots type)



Spur rotor blower (Roots type)

By adopting a cooling silencer, energy and maintenance cost saving are realized.


ARS/ARS-E

Discharge size: 50 - 250mm
Rated output: 1.5 - 132kW

The Benefits of the Cooling Silencer

With a significant bearing-cooling effect

Higher-speed operation

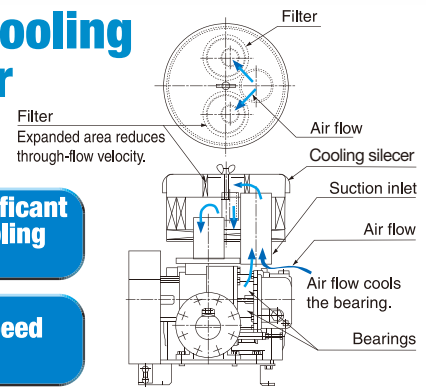

Features

Greatly improved isentropic efficiency

Estimated annual energy savings:

	Conventional model	ARS
Air flow rate (m ³ /min)	5.74	
Discharge pressure (kPa)	50	
Power requirement (kW)	8.5	7.1
Isentropic efficiency (%)	48.5	58.1
Motor output (kW)	11	7.5
Energy cost (¥)	1,266,000	1,057,000

[Operating period: 24 hrs/day (8,760 hrs/year) ¥17/kWh]

The energy savings are estimated as follows:
Difference in electricity cost:
1,266,000 - 1,057,000 = ¥209,000/year


What's more,

You can reduce your annual power consumption even more by selecting the next size smaller motor for your application.

Standard models develop pressure up to 80 kPa

This blower requires no cooling water or air cooling fan.

Compact rotors



Count on extended bearing life through improved durability.

Extended maintenance interval

Double the grease and oil maintenance intervals to six months.

Applications

Wastewater treatment

- Aeration at sewage treatment plants
- Aeration at onsite wastewater treatment systems
- Gas mixing
- Aeration of wastewater from food factory
- Aeration of wastewater from livestock farm

Pneumatic conveying

- Pneumatic conveying of cement powder
- Pneumatic conveying of wheat, soybeans
- Pneumatic conveying of garbage
- Dust collection

Others

- Oxygen supply at fish farms, aquariums, etc.
- Foaming of water at baths and swimming pools



Helical rotor blower (Roots type)

Comprehensive low-noise design.

The design suppresses vibration in the low-frequency range where blower noise is generated.

ARH-S/SP • ARH-E/EP

Discharge size: 20 - 200mm

Discharge size: 20 - 200mm

Rated output: 0.4 - 55kW


Rated output: 0.4 - 55kW



The reason why ShinMaywa blower noise suppression is successful is as follows. The main sources of blower noise include sources such as "pulsating noise of rotor", followed by "gear meshing", and then "bearings". Of particular note is the pulsating noise (roots noise) generated by the air which is displaced by the rotors. At ShinMaywa we have successfully used "3-lobe helical rotor" to greatly reduce the amount of this pulsating noise. Furthermore, ShinMaywa technology for suppressing sound is not limited to just the rotors. We have also devised a torsional shape for the teeth gears which drive the rotors.


Q What is the difference between helical-type rotors and spur-type rotors?

A ShinMaywa helical rotors have three lobes twisted in a spiral shape, so that they displace the air continuously to prevent pulsating noise from occurring.

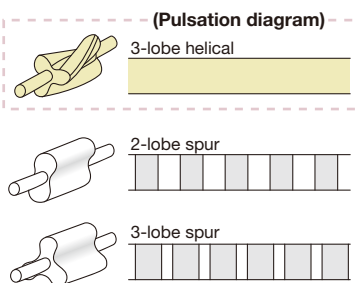

Q When the rotors are twisted, does the amount of blown air drop for each rotation?

A The tips of the rotor teeth used by ShinMaywa are slim. Therefore, even though the rotors are twisted, the amount of air blown per rotation is more than spur type blowers.



Q Because there is only a small gap between the twisted rotors and the rotor housing, is high-precision machining required?


A A high-precision machine called a "milling machine" is used for machining the screws and the gears, so that the rotors are manufactured with high precision and high reliability.



● Rotor processing using a milling machine

[Processing method]

The rotor turns slowly to match the rotation of the cutter. The cutter moves forward in the direction of the arrow while rotating.




Q How do you inspect the twisting of the precision rotors and the curve of the teeth?

A The shape of the rotor teeth is inspected using 3-dimensional measuring equipment. Measurement results are output to a plotter. Thorough quality control is carried out to ensure that the curvature of the teeth is within the allowable tolerances.



Results are output

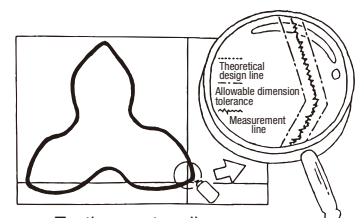

● Tooth curvature line


Submersible Helical Rotor Blower (Roots type)

Low Noise

Submersible blower with helical rotor can significantly reduce the noise level.

RB-H

Discharge size: 25 - 125mm
Rated output: 0.4 - 15kW

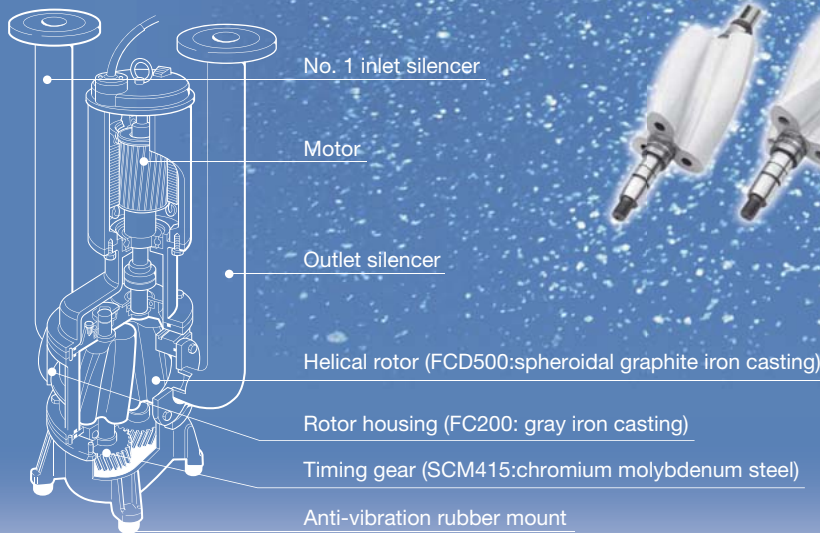

Features

- Installation space reduced to one-half that of the surface type.
- Three-lobe helical rotor.
- Proven reliability.
- Simple installation reduces installation time.
- Easy maintenance.

Applications

Aeration at wastewater treatment process such as;


- Sewage treatment plants
- Onsite wastewater treatment systems
- Industrial wastewater treatment systems
- Livestock wastewater treatment systems

Others


- Oxygen supply in aquariums, aquaculture ponds, etc.
- Foaming of water in baths and swimming pools.

Installation Examples

For aeration tank

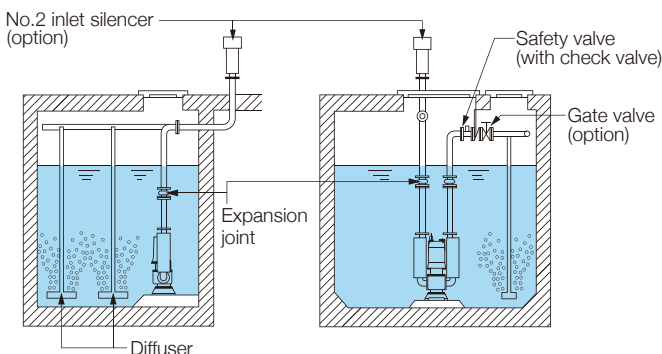

For effluent tank, defoaming tank and blower tank

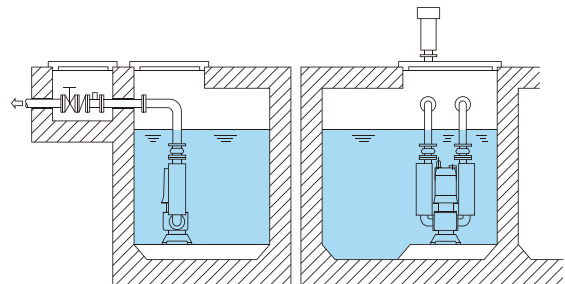


Bar Screen / Wedge Wire Screen

Automatic bar screen (fine spacing)

BS BS series is an automatic bar screen that applies to mainly onsite wastewater treatment systems. It has high durability for hard usage conditions such as 24-hour continuous operation, submergence, etc. and also available for industrial wastewater treatment.

Applications

- Removing suspended solid in onsite wastewater treatment systems.
- Removing suspended solid in industrial wastewater treatment facilities.

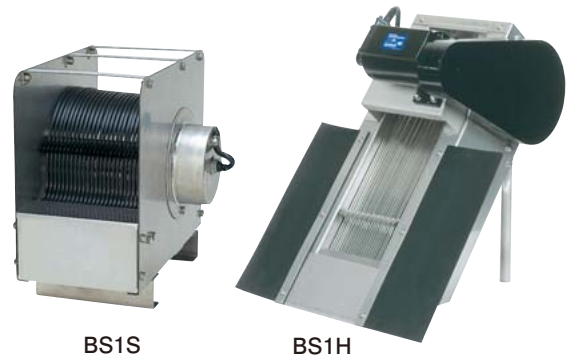


BS1S

BS1H

Automatic bar screen (coarse spacing, rotating belt type)

Automatic rotating belt type bar screen VS series is designed as inflow screen for onsite wastewater treatment systems. The feature of this product is not only scrape-up solids, but also can separate a variety of solids mechanically. It is available to install not only for new systems, but also for existing systems.



VS

*Full-surface cover for deodorization is available as an option.

Applications

- Removing suspended solid in onsite wastewater treatment systems.
- Removing suspended solid in industrial wastewater treatment facilities.

Wedge wire screen

SB and S series are wedge wire screen for removing a solids contained in sewage and wastewater. SB series: Anti-clogging operation by built-in rotation brush. S series: Easy and economical operation by simple structure.



S

Less breakdown with a simple structure that does not use power, maintenance cost that hardly takes.

SB

(with a built-in backwash brush)

Maintaining clean screen condition and less clogging.



Applications

- Removing suspended solid in sewage treatment plants and onsite wastewater treatment systems.
- Material recovery and wastewater treatment process in paper factory.
- Industrial wastewater treatment process in the food, fiber, and chemical industries.
- Separation and selection in mining water treatment facilities.

Supply records

BS1S



Site: Onsite wastewater treatment system

BS1H



Site: Rural site wastewater treatment plant

BS5N



Site: Confectionery plant

SB Screen



Site: Dairy products plant

SB Screen



Site: Fish processing plant

S Screen



Site: Pump station (River water intake)

Powerful swirl flow for a wide range of applications.

Features


High efficiency propeller

Adopt 3-D wing propeller

- Up to 40% reduction in power consumption compared with conventional models.
- Optimum design of propeller using CAE/CFD.
- Achieving the high performance airfoil.
- Improving wear resistance.

High efficiency motor

Optimum design of winding specifications and silicon steel sheet realize energy saving. Temperature rise characteristic is decreased and motor lifetime is improved.

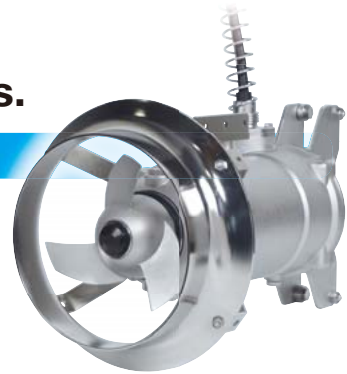

Improved reliability

Core wire seal, cable support coil and 316 stainless steel motor shaft are employed so that high durability and reliability are achieved.

Improved maintainability

Lightweight, compact in size and simple structure make easy handling. Intruded water into the motor can be easily checked through inspection plug.

Superb durability


Employed newly developed submersible motor, double mechanical seal with 4-face silicon carbide (SiC) is employed. Also, durability is improved by using large size bearing.

Efficient mixing by simple adjustment

As position and angle can be easily adjusted to the most efficient location, efficient mixing can be realized in accordance with shape, size and depth of tank, liquid characters and mixing purpose.

Flow stabilizer for low water level (option)

A flow stabilizer precludes sucking of swirl generated at low water level. Installation of a flow stabilizer allows operation with a lower water level than usual.

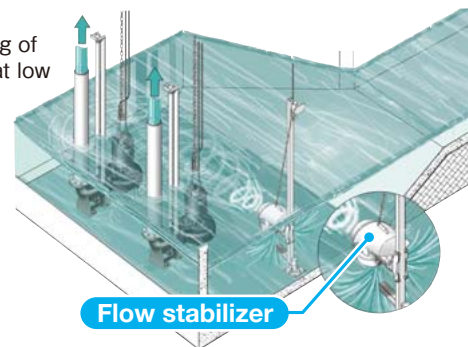

Flow stabilizer

High speed submersible mixer

SM/SME

Rated output:
0.25 - 15kW

Applications

- Mixing in a pump well, sludge storage tank or equalization tank.
- Crushing scum.

Draft ring

Assist generating more efficient flow.

Load side bearing

Improved durability employing large size bearing.

Shaft

High reliability with 316 stainless steel.

Dust seal

Double rubber seals prevent penetration and tangling of foreign matters.

Shaft seal

Employed double mechanical seal with 4-face SiC.

Oil plug for oil chamber

Oil chamber

Oil change can be taken without changing the posture of the mixer.

Drain plug for Leakage water chamber

Leakage water chamber

Leakage detector can be equipped. (Option)

Drain plug for motor chamber

Anti-load side bearing

Adopt the anti-creep bearing. (AC bearing)

Slide


Suitable for square pipe of installation equipment and no limitation of installation position.

Support coil


To fix cable vertically and prevent cable tangling.

Cable entry with core wire seal

Cable fixture



Adjust cable length and fix at upper part of tank to prevent sagging.

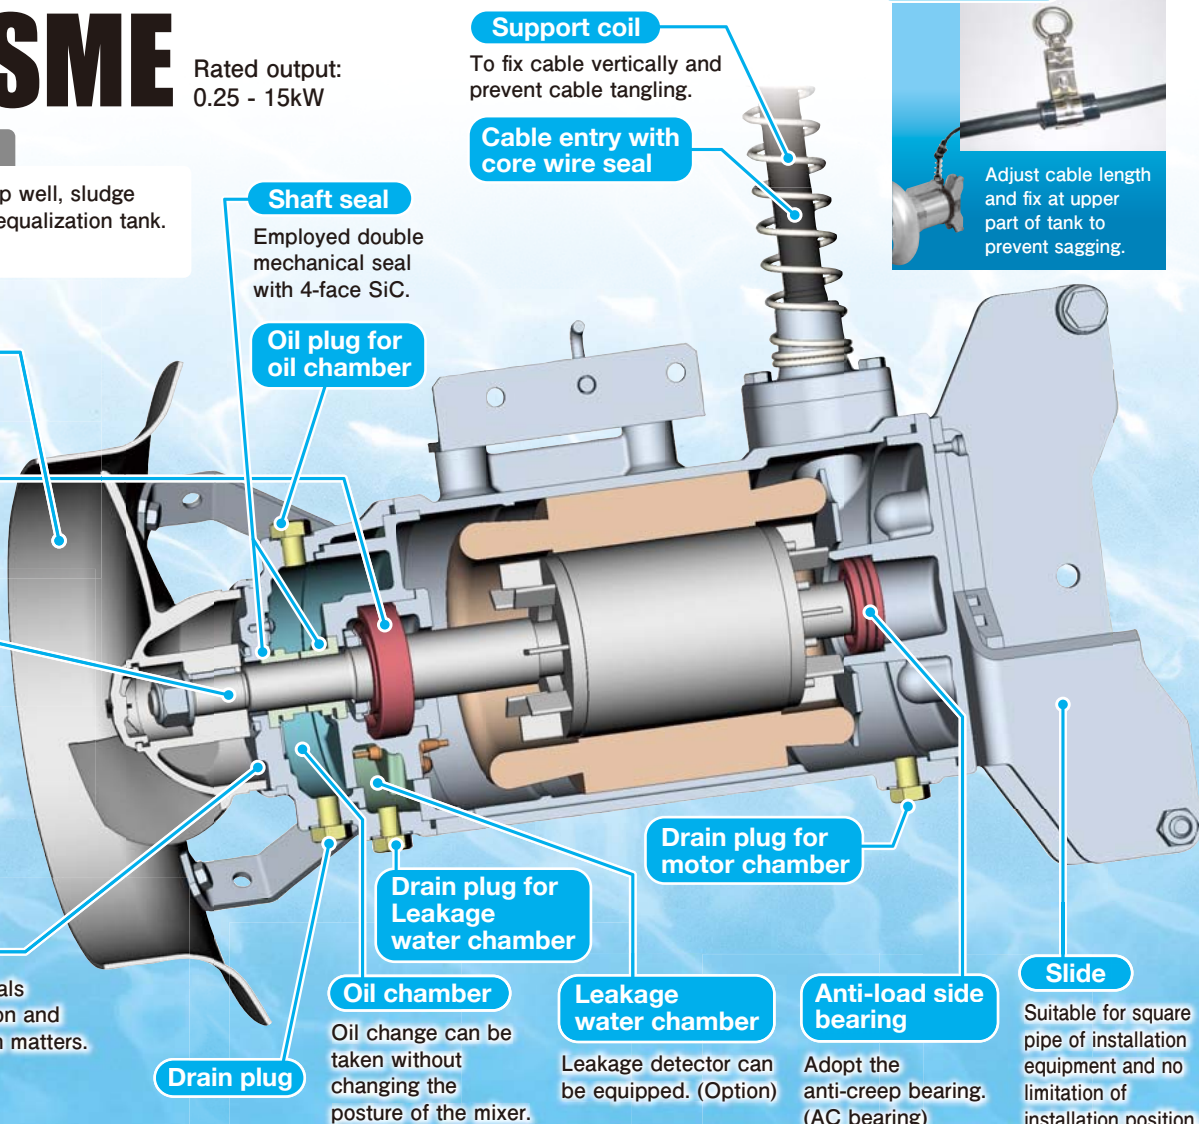

Adopting tungsten carbide spraying propeller

Coating the 316 stainless steel casting propeller by spraying the tungsten carbide. While having excellent corrosion resistance of stainless steel, it greatly enhances abrasion resistance.

Propeller wear is less than half that of stainless steel casting. "Tungsten carbide spraying" of the propeller's vane part is adopted for the first time by ShinMaywa in the industry. The Vickers hardness of tungsten carbide is more than 5 times that of stainless steel, and wear resistance is greatly improved.


SM-W/SME-W

Rated output:
0.9 - 7.5kW

Tungsten carbide spraying



Comparison of hardness (Vickers hardness)

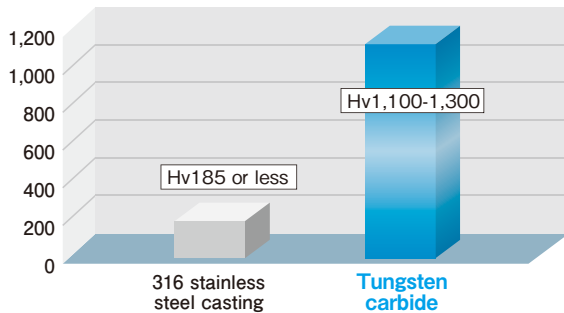


Installation equipment requiring no water drainage

When water cannot be drained from an existing tank, a submersible mixer that saves energy by powerful mixing can be installed without shutting down the wastewater treatment facility.

Opening



Fixed at the upper part of the tank.

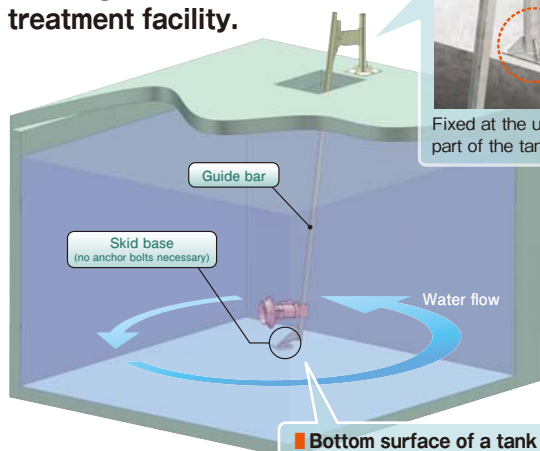

Bottom surface of a tank
(This photo may differ from product.)



A skid base is used to stabilize at the tank bottom.

SME-D

Rated output:
1.5, 2.8kW

Aeration mixer

Suppresses odor generation at a low water level.

SME-R

Rated output:
0.75 - 1.5kW

Applications

- Mixing of the pump station for wastewater collection system. Load reduction in post-process (sewage treatment plant) and prevention of hydrogen sulfide generation.
- Mixing of temporary wastewater storage tank for public and commercial facilities. Preventing sludge deposit and scum generation.



Medium speed submersible mixer


When used in a reaction tank, the mixing power can be reduced to 1/2 - 1/3 of the high speed submersible mixer.

SMM

Rated output:
0.75 - 2.2kW

Applications

- Mixing of denitrification tank, reaction tank
- Mixing the carriers in wastewater treatment




Low speed submersible mixer

Generate a huge water flow using minimal energy.

SML

Rated output:
1.5 - 3.7kW

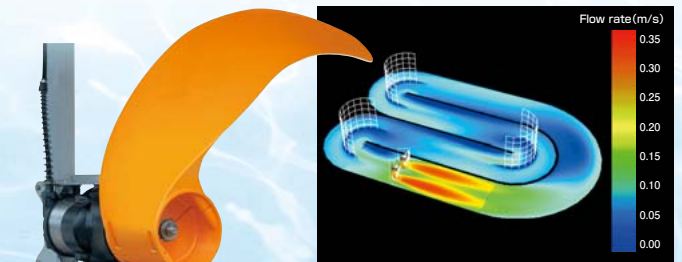

Applications

- Generating circulating water flow for Oxidation Ditch (OD) tank.
- Generation or circulation of water flow for dam and lake/bog.

Self-aspirating type

JSA

Rated output: 1.5 - 5.5kW

Save space

No need blower room.

Free from noise

No need blower and sound proof box.

Easy installation



Just only install at the center of tank.No need anchor bolt.

Strong agitating

Prevent sedimentation due to under ward discharge flow.

Easy maintenance


Durable structure same as submersible pumps.

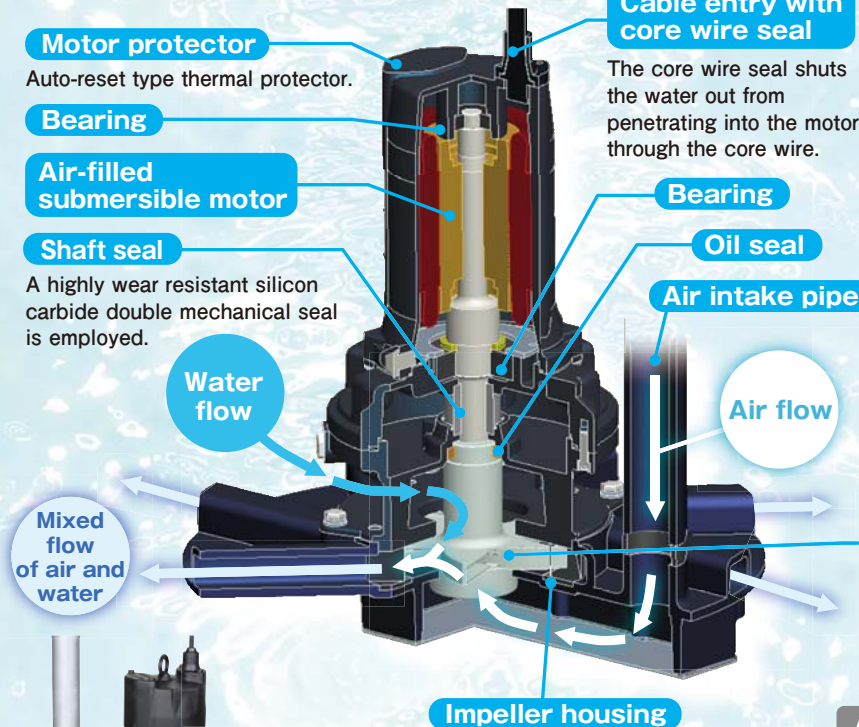

Outstanding features

Long service life

The top and bottom faces inside the housing are lined with stainless steel plates. It improves abrasion resistance and controls a reduction in air flow performance due to aging degradation.

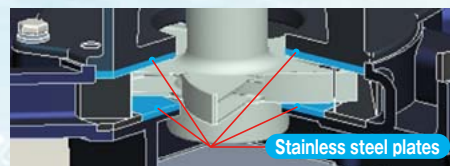

Impeller

The specially designed star-shaped hollow impeller. This special impeller makes foreign matter pass through smoothly.

Applications


- Sewage and Industrial wastewater treatment facilities.
 - Aeration and mixing processes
 - Sequential batch reactor (SBR) processes

Supply records

Onsite wastewater treatment system at condominium (underground)
 (Bangkok, Thailand.)



Wastewater treatment facility at food processing plant
 (Samut Prakan, Thailand.)

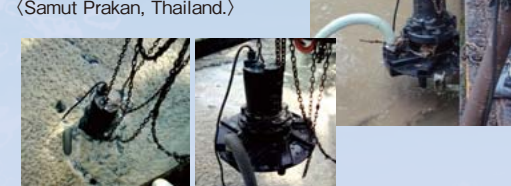

Aeration fountain pump

Contribute water quality purification and improvement of landscape.

SAF

Rated output: 1.5 - 3.7kW

Eject a large amount of water with an extremely low head, demonstrate excellent aeration effect.

Easy installation with a float type.

One- or two-stage type can be selected.

Available from water depth 1m.



Applications

- Preventing decay of water at park pond, moat etc.

For Wastewater Treatment


Submersible aerator

The SJ & SJL series offer powerful downward water flow to ensure mixing and high oxygen transfer efficiency. The compact, lightweight body allows for easy installation and maintenance.

SJ Downward discharge type / Multi-pole motor direct drive
Rated output: 0.75 - 7.5kW

Water flow
Airflow
Water & air (bubbles) flow

Guide rail installation

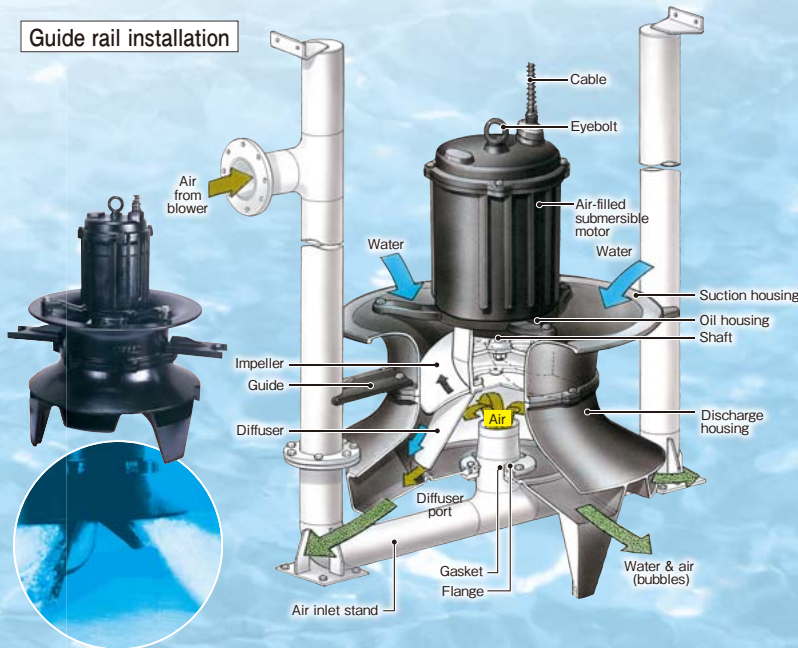

With dedicated reduction gear
Suitable for large-scale facilities.



SJL Downward discharge type / Submersible motor with reduction gear
Rated output: 2.2 - 30kW

The SU series has a compact, lightweight body with powerful upward flow. It is ideal for aeration and mixing in a deep tank to create an efficient uniform flow.




SU Upward discharge type / Multi-pole motor direct drive
Rated output: 1.5 - 15kW




Flow patterns in tank

● Aeration flow



● Mixing flow



Applications

- Sewage treatment: Aeration and mixing.
- Rural site wastewater treatment: Aeration and mixing.
- Industrial wastewater treatment: Aeration and mixing.
- Anoxic tank, anaerobic tank: Mixing.
- Equalization tank: Aeration and mixing.

For Wastewater Treatment and General Purpose

Submersible ejector

Submersible ejector forces sucked air into the tank through an ejector action with a jet of water, thereby stirring the liquid in the tank simultaneously.

J·JA Guide rail installation

JF·JAF Free-standing

Rated output: 0.75 - 5.5kW



Applications

- For preliminary aeration of purifying tanks.
- For preliminary aeration of industrial wastewater treatment plants, etc.

Submersible ejector for shallow tank

Maintain aerobic to the temporary storage sewage of the building, suppress sludge deposition and scum generation, cut the cause of the offensive odor from the beginning.

JB Guide rail installation

JBF Free-standing

Rated output: 0.4 - 1.5kW

Can be installed from existing building manhole (450/600 mm dia.).

Extensive aeration and stirring with twin diffuser.

Available in a wide range of water depth from 255 mm to 2,000 mm.



Applications

- For preventing malodor from sewage holding tanks in the building.
- Suitable for shopping malls, hotels, public facilities, buildings where many people gather.

ShinMaywa Pump Selector

ShinMaywa Pump Selector provides you to make easy selection from variety of ShinMaywa pump products to meet your application.

You can get pump selection and datasheet (specifications and performance curve) easily.

In addition to datasheet, you can also get technical information for selected pump including catalogue, drawings, CAD data, etc. through ShinMaywa Product Data Download system seamlessly.

Using ShinMaywa Pump Selector, you can make your decision quickly and make smooth communication with our sales representatives.

[Note] Please contact to our sales representatives for confirmation prior to place the order of ShinMaywa Pump product.



ShinMaywa Product



Specifications and dimensions are subject to change without notice.

ShinMaywa Industries, Ltd.

Sales & Marketing Dept., Fluid Div. 3-2-43, Shitte, Tsurumi-ku, Yokohama, 230-0003, Japan
 Phone : +81-45-584-1322 Fax : +81-45-575-2286
 E-mail : global.pump@shinmaywa.co.jp

ShinMaywa (America), Ltd.

Head Quarters
 10737 Gateway West, Suite 240,
 El Paso, Texas 79935, U.S.A.
 Phone : +1-915-594-9862
 Fax : +1-915-594-9866
 E-mail : info@shinmaywaamerica.com

North Carolina Branch
 6135 Park South Drive, Suite 510
 Charlotte, NC, 28210, U.S.A.
 Phone : +1-704-945-7112
 Fax : +1-704-945-7101
 E-mail : pump@shinmaywaamerica.com

URL : <https://www.shinmaywa.co.jp/america/index.html>

ShinMaywa (Asia) Pte. Ltd.

8 Burn Road, #14-10 Trivex,
 Singapore 369977
 Phone : +65-6224-0728
 Fax : +65-6224-9678
 E-mail : asia.ad@shinmaywa.com.sg

ShinMaywa (Shanghai) Trading Co., Ltd.

201107 Building 6, Youleja City, Industrial Park, 333 Lane,
 Zhubian Road Minhang, Shanghai, China
 Phone : +86-21-5296-2966
 Fax : +86-21-5296-2970
 E-mail : shanghai@shinmaywa.co.jp



ShinMaywa ONO PLANT

ISO 9001(No.956445)/ISO 14001(No.771888)